






HAND SETS

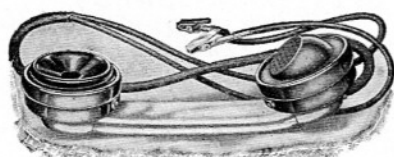

No. 1001A

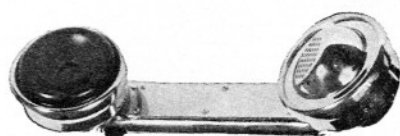

No. 1001C Hand Set



No. 1001 Type

The No. 1001 Type Hand Sets were originally intended for the use of linemen and are designed to withstand the rough handling, incidental to such service. This design proved to be so satisfactory that it is now used extensively for a number of different purposes, as described below.

The handles are made of brass tubing with drawn brass end pieces and the transmitters and receivers are provided with drawn brass cases equipped with screw clamping rings, thereby making an instrument that is extremely rugged.

The Nos. 1001C and H Hand Sets are provided with a push button switch which is connected so that these hand sets function the same as the No. 1020AL Desk Stand. In view of this, they may be used in connection with our regular magneto and central battery desk set boxes in place of a desk stand, in cases where the service conditions are such that a hand set is required.

Code No.	Transmitter	Receiver	Cords		Push Button Spring Combination	Principal Use
			Code No.	Length		
1001A	244	131	243	8 ins.	None	Used by lineman as a test set on central battery lines. The cord is equipped with spring connection clips.
			2-574	5 ft.		
			(waterproof)			
1001C	285	131	366	6 ft.	2 make	Used with Nos. 1330 and 1331 Portable Magneto Telephones.
			(waterproof)			
1001H	244	131	422	5 ft. 2 ins.	2 make	Used with No. 1375B Portable Magneto Telephone.
			(waterproof)			
1001J	244	131	502	6 ft.	1 make	Used with desk Interphones. No. 1 System.
					and	
					1 break	

Note 1. See "Hand Set Hangers" and No. 141A Switch Hook.

Note 2. Further data on above hand set transmitters and receivers are listed under their respective headings.


Note 3. For a hand set wired similar to the No. 1001A Type, but having a cut-out button, the Nos. 1001C or H Types may be used, making line connections by means of the green and yellow tracer conductors of the hand set cord only.

HAND SETS—Continued


No. 1002 Type



NO. 1002-D



NO. 1002-E



NO. 1002-AC



No. 1002AC

The transmitter and receiver of the No. 1002 Type Hand Sets are mounted on a nickel plated tubular brass frame, equipped with a hard rubber handle. A switch mounted within the frame, is actuated by a plunger which terminates in a ring by which the Hand Set is suspended, when not in use. When the Hand Set is removed from the hook, the switch is automatically closed. These Hand Sets function the same as certain desk stands, and may be used in place of desk stands if required. A hook (No. 141A Switchhook) is furnished with each Hand Set.

Code No.	Trans-mitter	Re-celver	Code No.	Length	Cords		Code No.	Length	Switch Combination
					Code No.	Length			
1002D	267	141	336	14 ins.	414	8½ ins.	429	4 ft. 6 ins.	1 make and 1 break
1002E	267	141	336	14 ins.	402	8½ ins.	430	4 ft. 6 ins.	1 make contact
1002AC	267	141	415	9½ ins.	414	4¼ ins.	318	4 ft. (3 conductors)	2 make

“E” Type

The “E” Type Hand Sets listed below are finished in black. These Sets are also available, however, finished in ivory, gray, old brass, statuary bronze, oxidized silver, medium gold and dark gold. The dash (—) number part of the code indicates the color and should be specified on the order. Representative dash (—) numbers used to designate these colors are as follows:

Black.....	—3	Statuary Bronze.....	— 7
Ivory.....	—4	Oxidized Silver.....	— 8
Gray.....	—5	Medium Gold.....	—11
Old Brass.....	—6	Dark Gold.....	—12



E1B TYPE

The No. E1B Type Hand Set is intended for use with C1, D1 or similar type Handset Mountings as station Hand Telephone Sets.

Code No.	Trans-mitter	Receiver	Code	Cord	Length	Hand Set Handle
E1B-3	395B-3	557B-3	*H3B9		4 ft.	E13

* If an E1B-3 Hand Set is desired equipped with a water-proof cord in place of the H3B9 cord, order should specify H3C water-proof cord.

E2A TYPE

The No. E2A Type Hand Set is intended for use in central offices and in P.B.X. systems.

Code No.	Trans-mitter	Receiver	Code	Cord	Length	Equipped with Plug	Handset Handle
E2A-3	395B-3	557B-3	H4C		4 ft.	137	E23

HAND SETS—Continued**E2B TYPE**

The No. E2B Type Hand Set is a four conductor Hand Set intended for use on anti-sidetone local battery talking-common battery signaling subscriber sets in manual or dial systems. Forms a part of the 206 Type Hand Telephone Set.

Code No.	Transmitter	Receiver	Code	Cord	Length	Handset Handle
E2B-3	395B-3	574A-3	H4D9		4 ft.	E23

Handset Hangers

Code No.	Description
1B	Mounts on a vertical surface for holding a No. 1001 Type Hand Set when not in use. The Hand Set is suspended by its receiver, which fits into a recess in the hanger. Cast brass; black finish. Overall dimensions, $3\frac{1}{16}$ inches wide, $2\frac{1}{2}$ inches deep, and $3\frac{3}{8}$ inches high.
1C	Same as the No. 1B, except that it is equipped with rubber studs and a spring, so arranged as to prevent the Hand Set from swaying. Used principally on steamships.
4A	Black finished hook arranged for supporting an E1B or E2 Type Hand Set and a black finished bumper plate into which is fastened a linoleum pad. Intended to mount on the face of P.B.X. switchboards, order turrets, etc.
5A	Consists of a No. 4A Handset Hanger provided with a reversible mounting bracket. Intended to mount on either the right or left end panel of P.B.X. switchboards. Bumper plate must be mounted accordingly.

Handset Mountings

The following Handset Mountings are for use with E1B, E2B or similar type Hand Sets and form a part of the 200 Type Hand Telephone Sets listed elsewhere in this catalog.

The Handset Mountings described below are finished in black. They are available, however, in ivory, gray, old brass, statuary bronze, oxidized silver, medium gold and dark gold. The dash (—) number part of the code indicates the color and should be specified on the order. Representative dash (—) numbers used to designate these colors are as follows:

Black	—3	Statuary Bronze	—7
Ivory	—4	Oxidized Silver	—8
Gray	—5	Medium Gold	—11
Old Brass	—6	Dark Gold	—12