

INSIDE WIRE

CONN. BLOCK (SEE NOTE)

MTG. CORD

TERM. STRIP

LINE KEY

HOLD KEY

NIGHT LAMP TERM. BLOCK

LINE SWITCH

NETWORK

DIAL

HANDSET

TO DIAL LIGHT TRANSF.

7 (BK)

6 (W)

4 (BL)

1 (G)

2 (R)

5 (Y)

10 (W-O)

8 (BK)

1 (G)

7 (S)

2 (W)

9 (R)

5 (Y)

4 (W)

E2 (BL)

(BL)

(G)

(W-O)

(BK)

(G)

(S)

(W)

(R)

(Y)

m

n

(Y)

(S)

(O)

(BK)

(BR)

(R)

(Y)

E1

1 (G)

4 (BL)

2 (O)

3

5

6

(G-BK)

(S-R)

(G)

(BL)

(O)

j

k

g (BK)

f (R)

R

GN

B

(R-G)

(W)

(BK)

(W-BL)

(W)

(R)

(R)

L2

d (G)

e (W)

F

(G)

RR

(BK)

G

C

(O-BK)

(BR)

(Y)

(S)

L1

c

b

a

* INSULATED AND STORED

NOTE:
IF RINGER IS REQUIRED, REPLACE CONNECTING BLOCK WITH SEPARATELY ORDERED EI-TYPE RINGER.

© American Telephone and Telegraph Company, 1970
Printed in U.S.A.

TABLE A

**POLARITY GUARD CONNECTIONS
(P-90D052 GUARD ASSEMBLY)**

LEAD		REMOVE FROM	CONNECT TO	
		NET.	NET.	TERM. STRIP
Line Switch	BR	C		4*
Dial	BK	RR		E2*
Polarity Guard	R BK G W		RR C	E2* 4*

* Disconnect, insulate and store (W) and (BL) line switch leads from terminals 4 and E2.

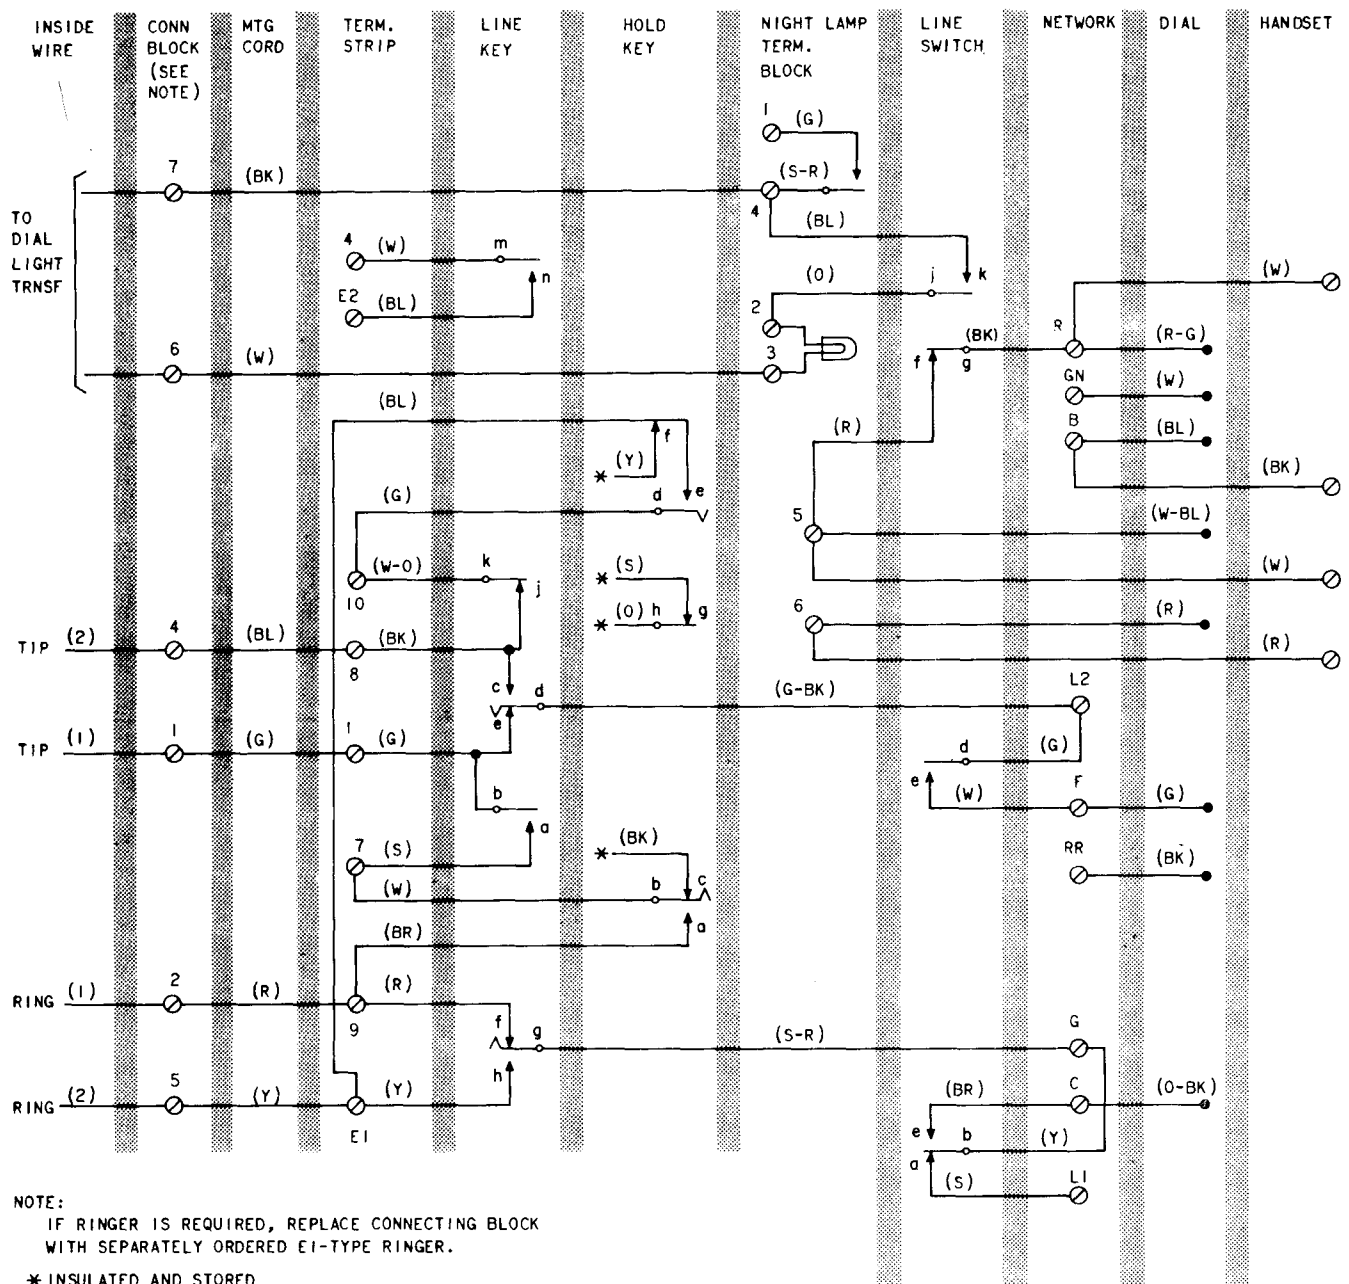


Fig. 2—1713B Telephone Set Connections With 25P4 Dial