


## SERVICE

### 2702D TELEPHONE SETS

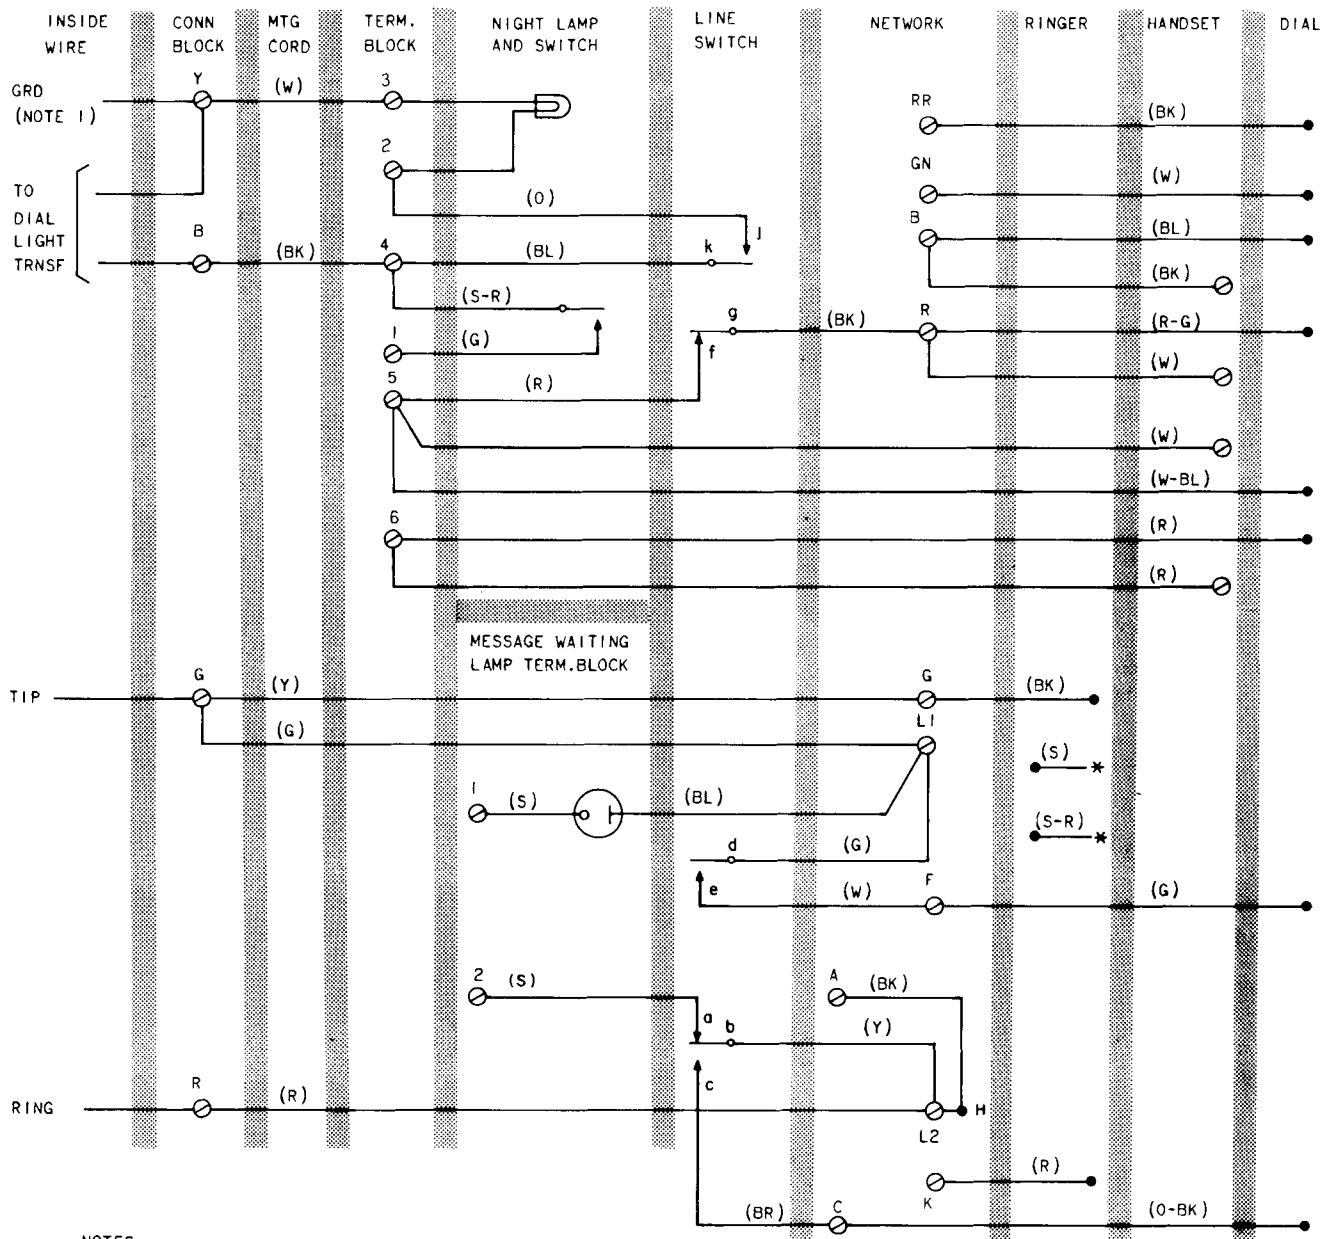

**NOTES:**

1. GROUND MAY BE OMITTED IF NOT REQUIRED FOR SERVICE; NOT NECESSARY FOR DIAL LIGHT TRANSFORMER PROTECTION.
2. TO PERMANENTLY SILENCE RINGER, DISCONNECT (R) RINGER LEAD AT K OF NETWORK. INSULATE AND STORE LEAD.
3. SET WIRED FOR BRIDGED RINGING.

- \* INSULATED AND STORED
- ( ) CURRENT COLOR CODE
- [ ] MD COLOR CODE

**Fig. 1—2702D Telephone Set, Connections**

TABLE A  
POLARITY GUARD CONNECTIONS  
(D-180229 Kit of Parts)

WIRE OR LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	TERM. BLOCK*
Line Switch	(BR)	C		4
Dial	(BK)	RR		3
D-180229 Polarity Guard	(R)			3
	(BK)			4
	(G)		RR	
	(W)		C	

\* Component of message waiting lamp assembly located between dial mounting brackets. Use screws from terminal board in D-180229 Kit of Parts.

**Note:** Terminal board and retainer furnished with D-180229 Kit of Parts are not used on sets equipped with message waiting feature. Install polarity guard only when specified by local instructions for end-to-end signaling.