

◆ TABLE H ◆

INTENDED USE OF 8-TYPE DIALS

NEW DIAL CODE	REPLACES OLD DIAL CODE	SCHEMATIC FIG.	PULSES PER SECOND	INTENDED USE
8AA	8A	11A	10	700-series PRINCESS® telephone sets 750-, 751-, and 753-type panel telephone sets
8BA	8B	11B		752- and 754-type panel telephone sets — 1008B dial — 60A telephone console.
8CA-58†	8C-58			Speakerphone dial for 600- and 800-series telephone sets, 14A1- and 15A1-type telephone consoles, and 800A PBX.
	8P-58			836AM and 837AM telephone sets
8DA-119 (A&M Only)	8DT-119	11A		870A1M and 872A1M telephone sets
8EA-119	8ET-119	11B		700-series PRINCESS® telephone sets J1D200, J1D400, and J1D600 data sets
8FA	8F	11A		32A, 33A, and 35A teletypewriters
8GA	8G			900-series DESIGN LINE* telephone sets
8HA-119	8HT-119			11-type apparatus units for data set 202C and data auxiliary sets 804A1 or 804A2
8HA-120	8HT-120			
8JA	8J	11B		
8KA-58	8K-58	11B	20	Telephone consoles in 1A and 2A telephone answering service systems
8LA-58	8L-58	11A	10	3C and 4B telephone consoles
8MA-52	8M-52	11C		235G-67A coin collector
8NA-119	8NT-119	11B		900-series DESIGN LINE telephone sets used with speakerphone
8NA-120	8NT-120			CALL DIRECTOR® sets, card dialers, 10- and 20-button sets, and 851-type telephone sets
8RA-58	8R-58	11A		900-series key telephone sets
8SA-119		11D		951A1-03 DESIGN LINE telephone set
8TA-119		11E		952A1-03 DESIGN LINE telephone set
8UA		11A		1A1, 1C1, 2A1, 2C1, and 1E1 coin telephone sets
8UB				800-Series DESIGN LINE telephone sets
8WA-03	8W-03	11B		
8WA-52	8W-52			
8YA-120		11A	10	

* Trademark AT&TCo.

† Interference between the spring block of the 8CA-58 dial and the top plate of the 690 subscriber set will require the replacement of the top plate with a new plate.

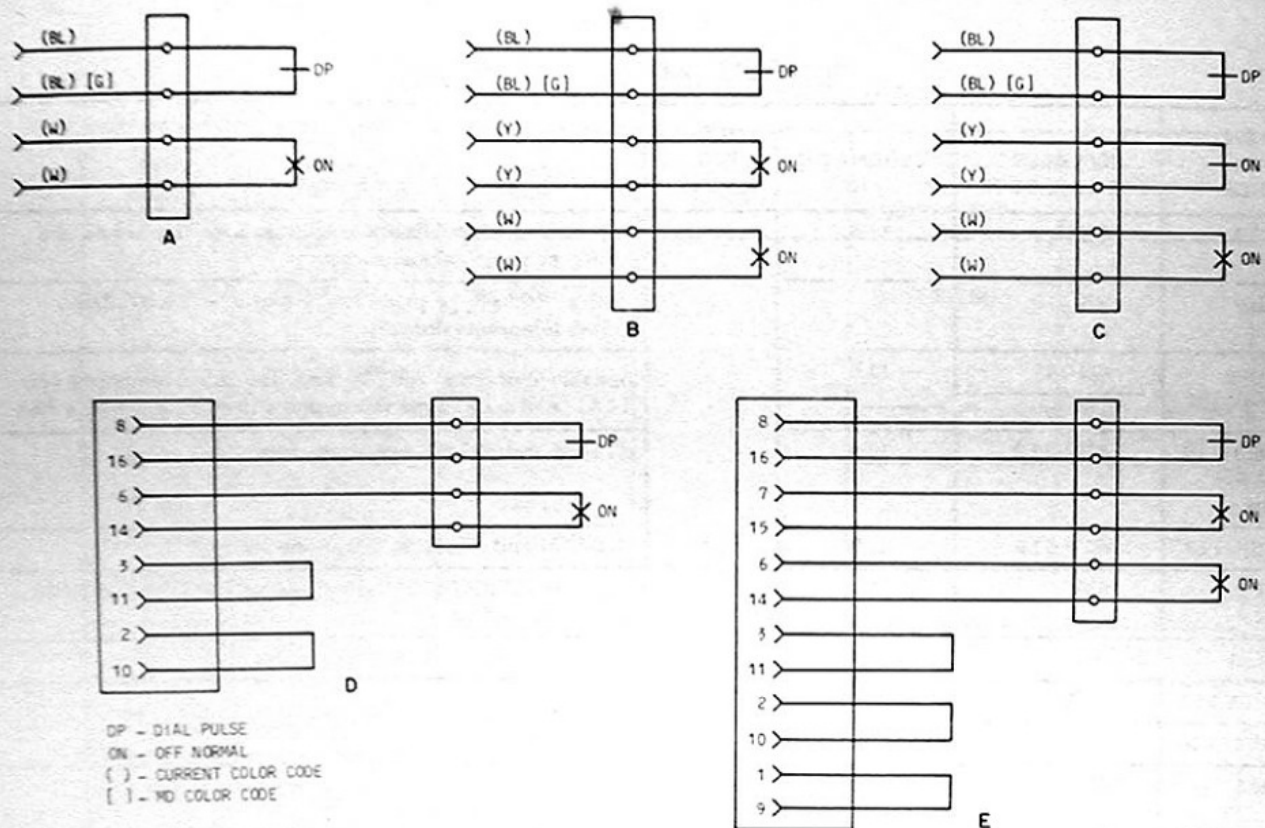


Fig. 11—8-Type Dial Contact Schematics

3.39 New Double Lettered: (Except for 8MA or 8WA Dial).

(a) To remove number plate.

- (1) Remove fingerwheel (see paragraph 3.19 for plastic fingerwheel or paragraph 3.37 for metal fingerwheel).
- (2) Remove fingerstop by depressing plastic locking tab.
- (3) Rotate number plate clockwise approximately 1/2-inch, lift number plate from dial clearing tabs of clamp plate (Fig. 32).
- (4) Before placing new number plate on the dial, wipe face of light guide clean.

(b) To replace number plate, reverse procedures.

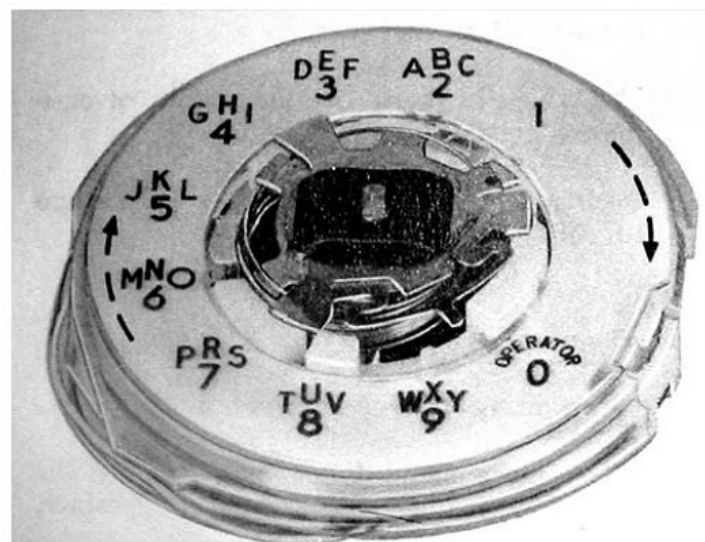


Fig. 32—8-Type Dial, Removal of Number Plate