

BELL SYSTEM PRACTICES
Station Installation and Maintenance

SECTION C64.255
Issue 1, 6-9-50
AT&T Co Provisional

PREPAYMENT COIN COLLECTORS
D-178940, D-178942
DIAL SHORT-CIRCUITING,
THREE SPRING RELAY
COMMON BATTERY—CONNECTIONS

1. GENERAL

1.01 This section covers the connections for D-178940 and D-178942 coin collectors. The circuit diagrams shown herein are for anti-sidetone, common battery stations, only.

1.02 The loop and coin range limitations given in Section C64.241 and the line termination connections given in Section C64.245 for other type coin collectors also apply to these coin collectors.

2. DIAL SHORT-CIRCUITING—THREE SPRING RELAY TYPE—COMMON BATTERY STATIONS—CONNECTIONS


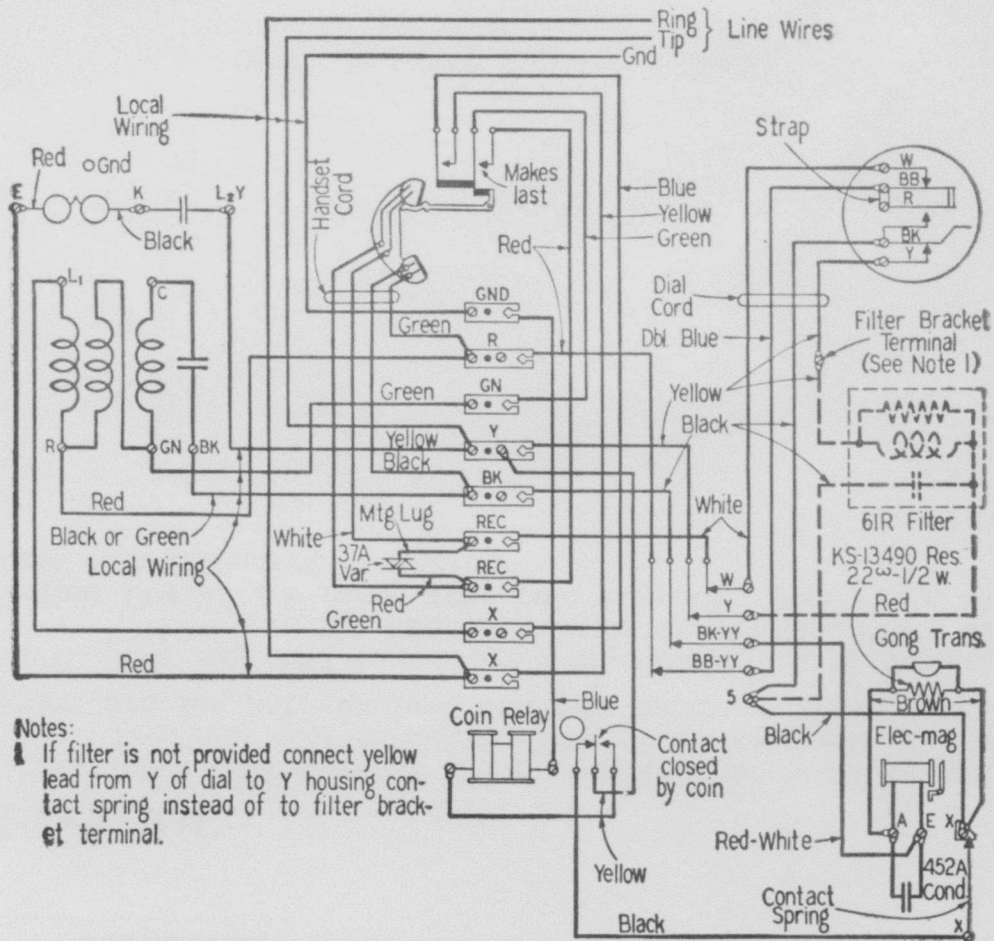


Fig. 1—D-178940 Coin Collector with Anti-Sidetone Subscriber Set

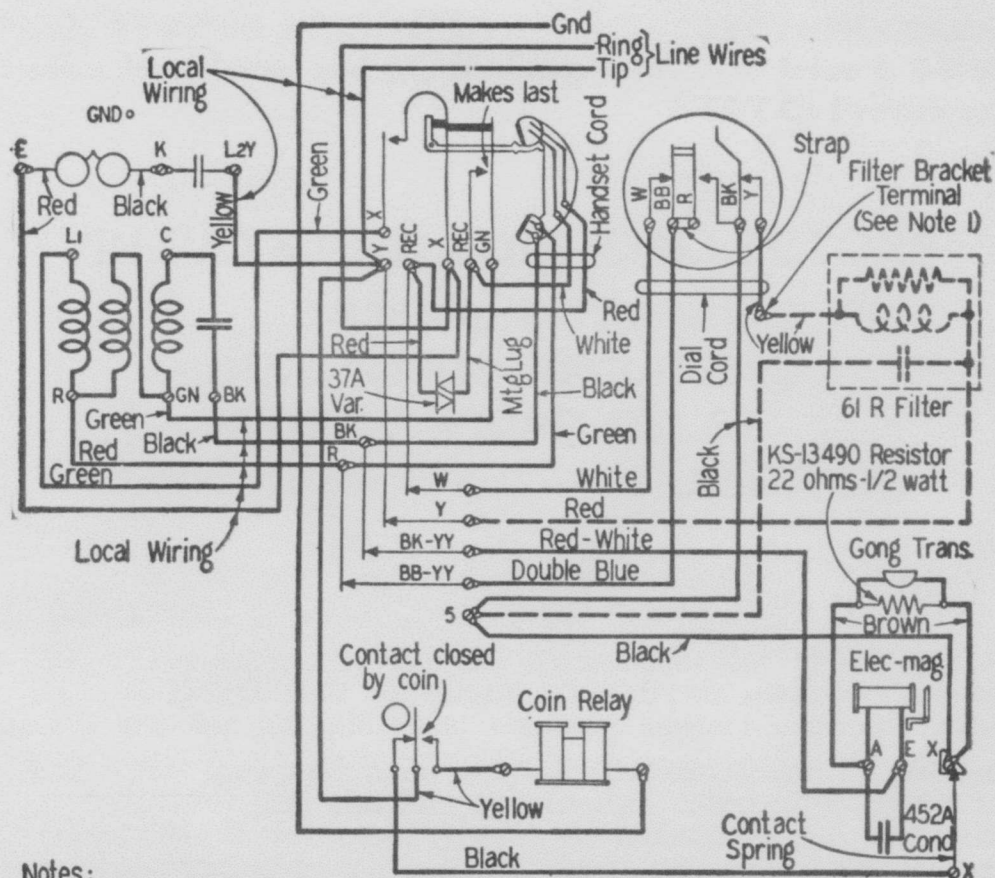

Notes:
 1 If filter is not provided connect yellow lead from Y of dial to Y housing contact spring instead of to Filter Bracket Terminal.

Fig. 2—D-178942 Coin Collector with Anti-Sidetone Subscriber Set