


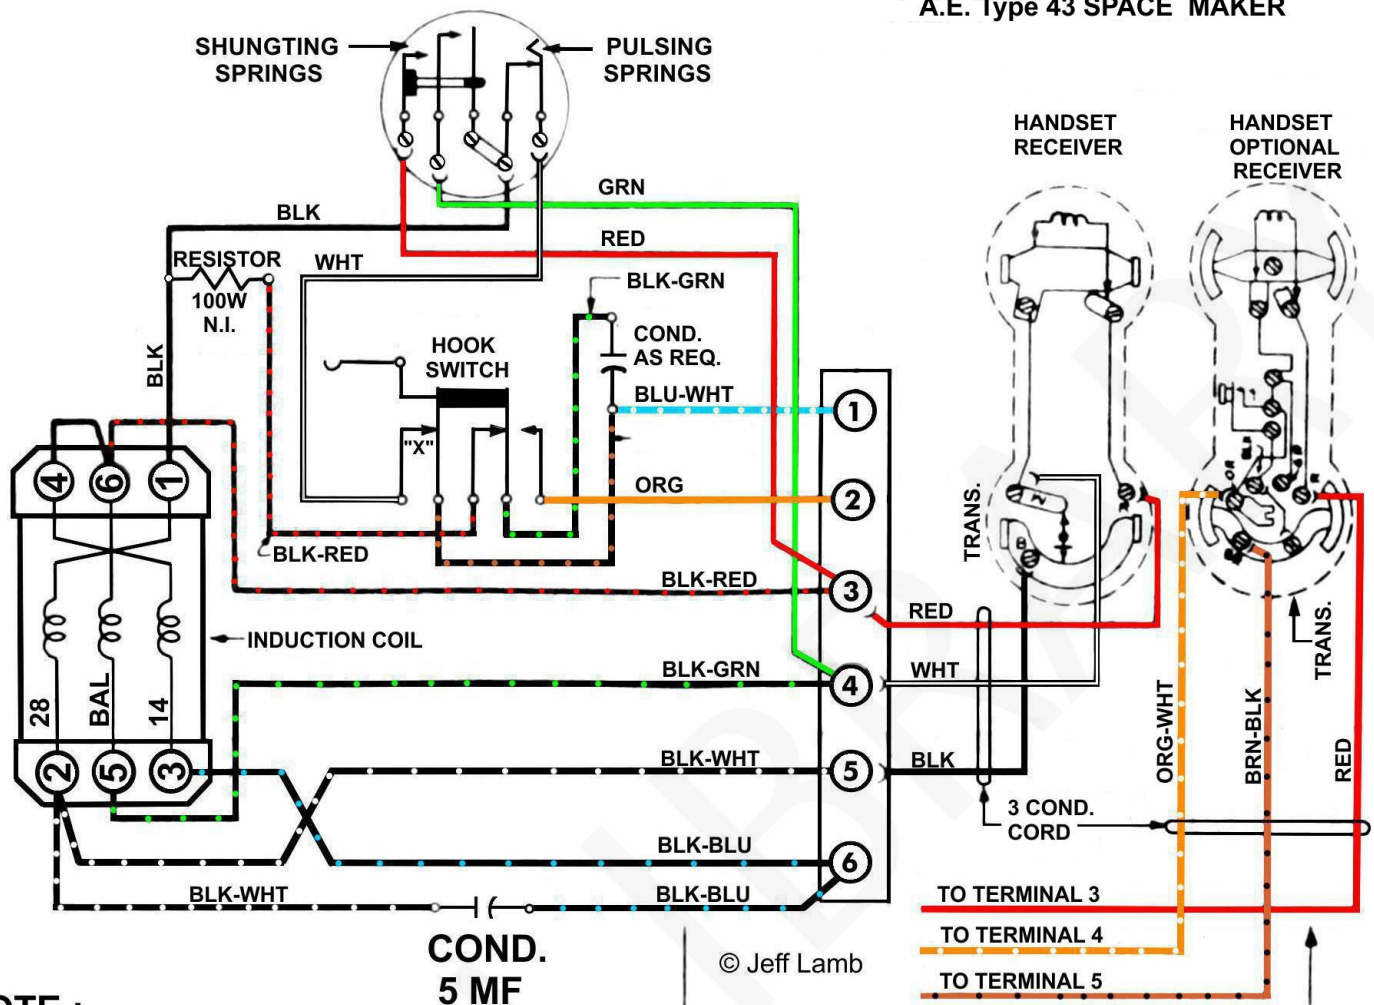

NOTE :

- 1 - WHEN NO DIAL IS USED PUT BOTH BLK & WHT DIAL WIRES UNDER SCREW IN DIAL HOLE HOLE COVER.
- 2 - "X" CONTACTS TO BREAK FIRST & MAKE LAST.
- 3 - WHEN RINGER BOX IS EQUIPPED WITH COND. CONNECT RINGER TO L1 & L2 (TERMS 1 & 4). WHEN RINGER BOX IS NOT EQUIPPED WITH COND. CONNECT RINGER TO TERMS. 2 & 4.

"HANDSET WITH TRANSMITTER CUTOUT PUSH BUTTON FOR NOISY LOCATIONS"

LINE CONNECTIONS :

- LINE - 1 : TERMINAL No. 1
 LINE - 2 : TERMINAL No. 4

**AUTOMATIC ELECTRIC COMPANY
 CHICAGO, U. S. A.**

PRINTED IN U.S.A.