


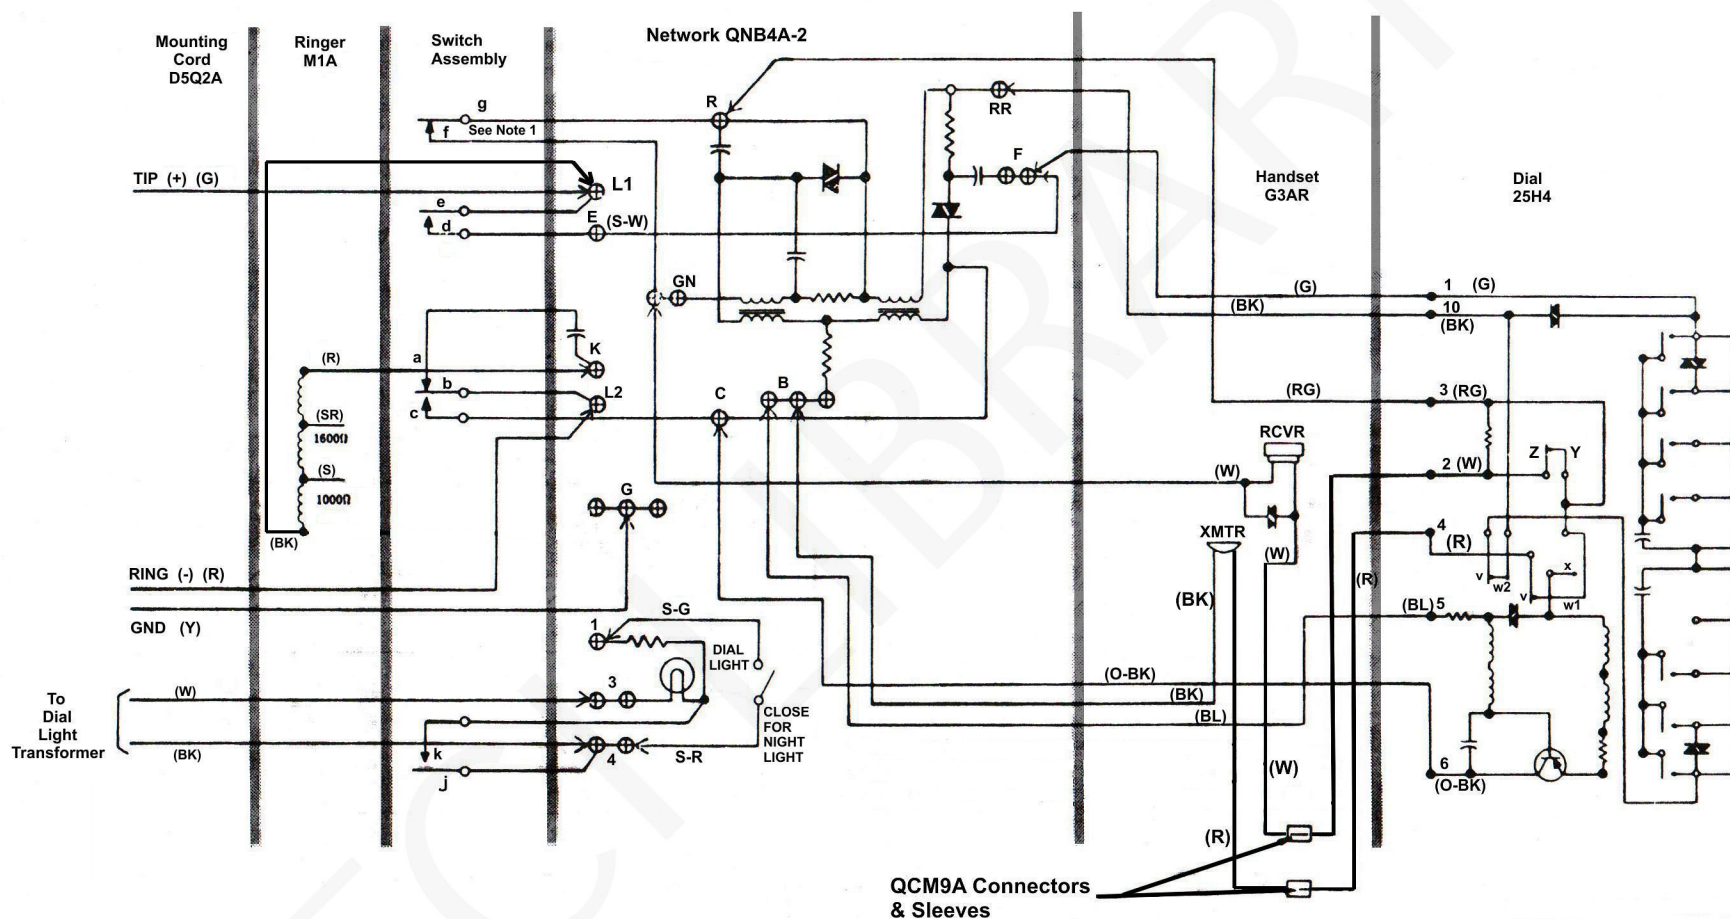

- NOTES:**
1. When the handset is removed, the cradle contacts "G" & "F" breaks last.
 2. When leads are not used, spade tips shall be insulated individually by assembling cord tip insulator KS-19147, List 1 and stored so that they cannot interfere with ringer gong.
 3. Schematic shows set wired for bridged ringing.

N.E. 1702-B Desk Set QNB4A-2 Network & 25H4 10 Button DigiTone Dial