


Get the most out of your communication system  
by increasing its call handling efficiency with...

## The 24A Indicator



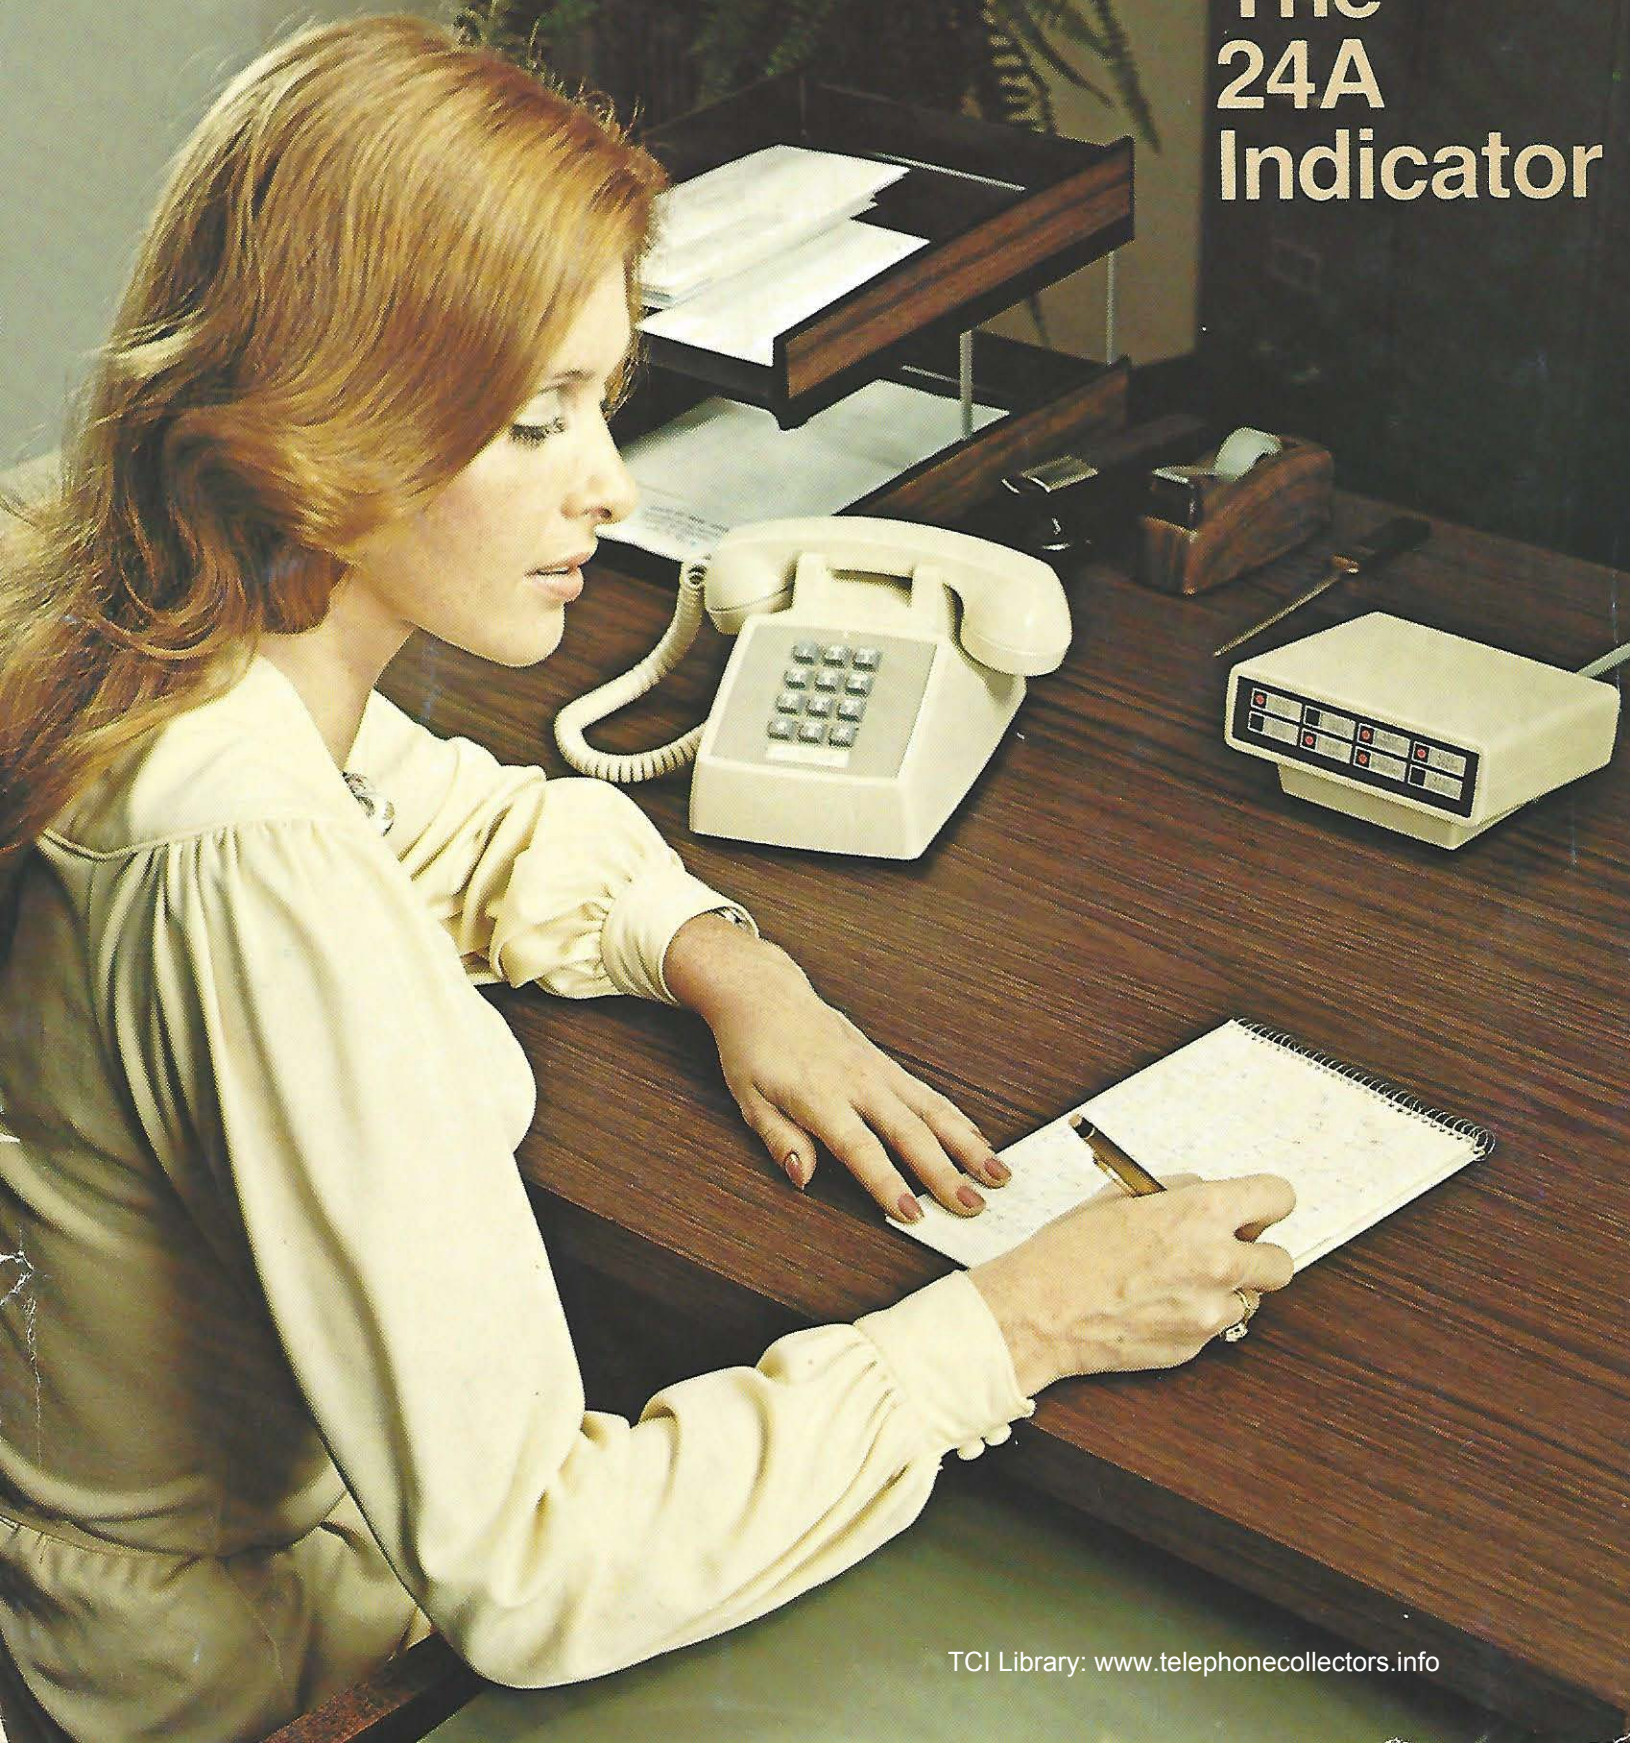

# The 24A Indicator is...

used in conjunction with optional features provided by No. 1 and No. 2 ESS and DIMENSION® PBX to provide an alternative method of controlling incoming calls. Station lines from these systems can be bridged and monitored and visual and audible signals provided to indicate the status of these monitored lines.

## And it's Economical

—it provides a functional equivalent to key telephone systems in secondary answering applications without the need for the more costly key telephone sets.

## and Efficient

—lets those at the answering location know the status of all extensions in the group and to take action when necessary.




The 24A Indicators furnish a continuous status display of all stations in call pickup and hold groups by providing

**A** fluttering LED together with tone ringing to indicate a ringing station

**B** dark LED to denote an idle station


**C** steady LED to indicate a busy station

The units are available in a 8, 16, or 32 line capacity and are suitable for desk or wall mounting for your convenience.

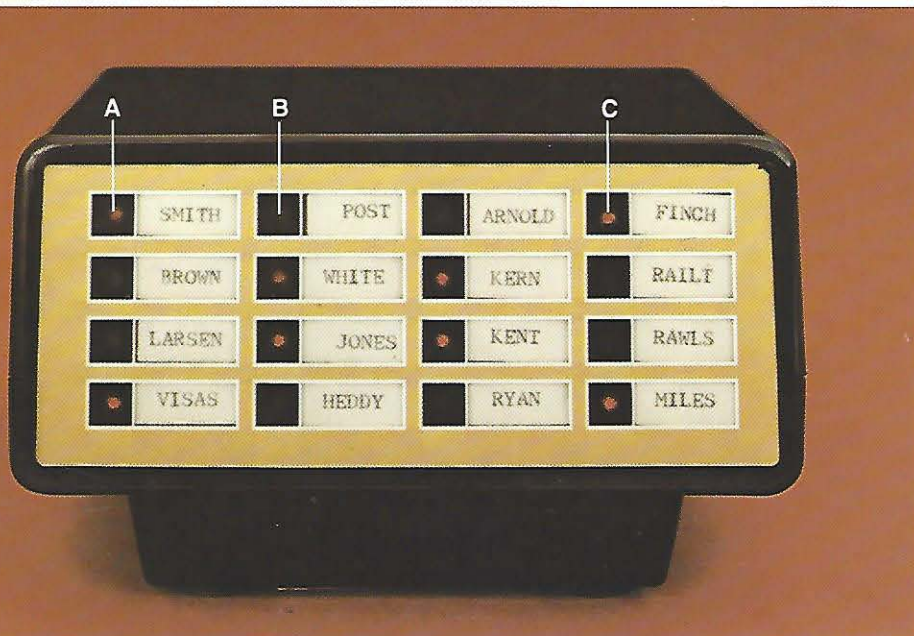

## You get your choice of colors too—

The housings are available in



Ivory



Black



Black\*



Orange\*+



Blue\*+



Avocado\*+



Brown\*+



Teak+



Gold\*+



Red\*+



Walnut+

\*Available for face plate

+Available for rear panel

**The 24A Indicator**—another way to improve the efficiency of your telephone system.



8 LSA--  
16 LSS  
32 LST