

STROMBERG-CARLSON CORPORATION

S-C2550B TELEPHONE

WIRING DIAGRAM
BRIDGED RINGING SHOWN

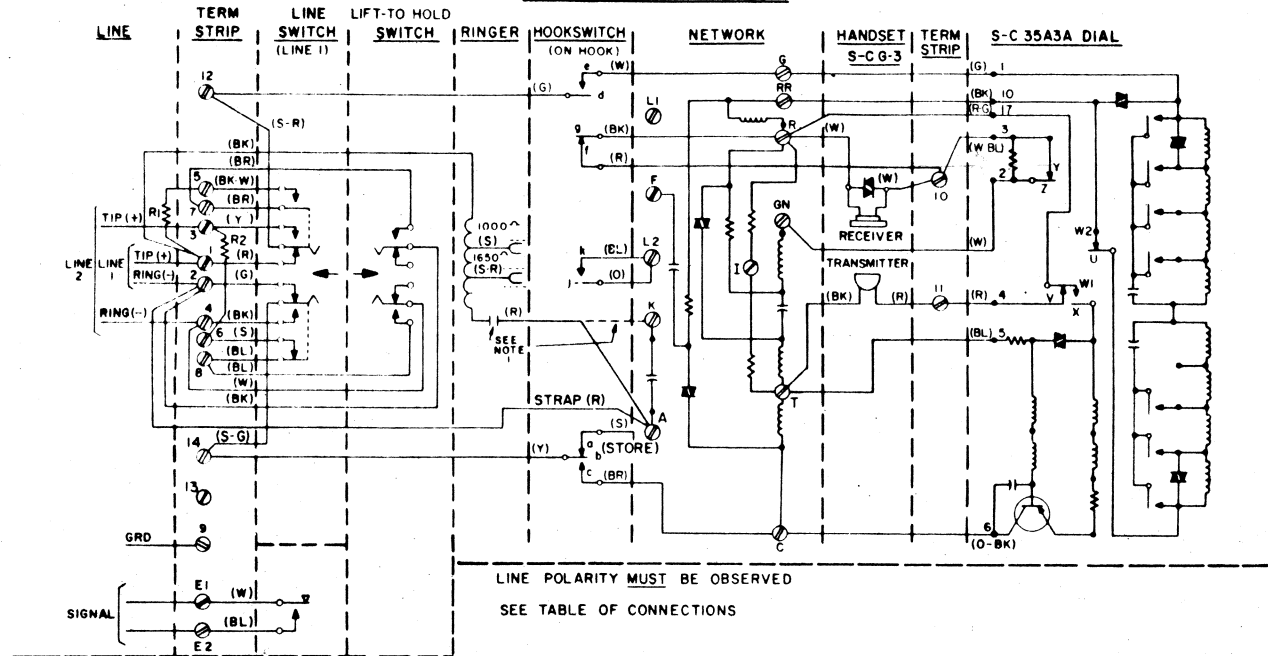


TABLE OF CONNECTIONS

CLASS OF SERVICE	CONNECTIONS AT NETWORK OR TERMINAL BD								
	LINE			RINGER LEADS (SEE NOTE 1)				HOOKSW LEADS	
	RING(-)	TIP(+)	GRD	R	BK	S R	S	W	BR Y
BRIDGED	2	1	9	A	1	-	-	G	C 2
RING PARTY	2	1	9	A	9	-	-	G	C 2
TIP PARTY	1	2	9	A	9	-	-	C	G 2
NOTES:									
1-STRAIGHT LINE RINGERS AND 16,16 2/3, 20 CPS TUNED RINGERS HAVE NO CAPACITOR IN SERIES WITH (R) RINGER LEAD. WHEN THESE RINGERS ARE USED, CONNECT (R) RINGER LEAD TO TERMINAL K ON NETWORK.									
2- TO SILENCE RINGER PERMANENTLY, DISCONNECT THE (R) RINGER LEAD FROM THE A OR K TERMINAL ON THE NETWORK. INSULATE AND STORE.									
3- TO USE SIGNAL SWITCH FOR PUSHBUTTON TRANSFER, CONNECT (W) SIGNAL SWITCH LEAD TO EARTH GROUND (TERMINAL 9) AND MOVE (BL) SIGNAL SWITCH LEAD TO C TERMINAL ON NETWORK.									
4- IF POLARITY GUARD IS REQUIRED, ORDER 206289-211 PACKAGE ASSEMBLY AND CONNECT AS SHOWN.									