


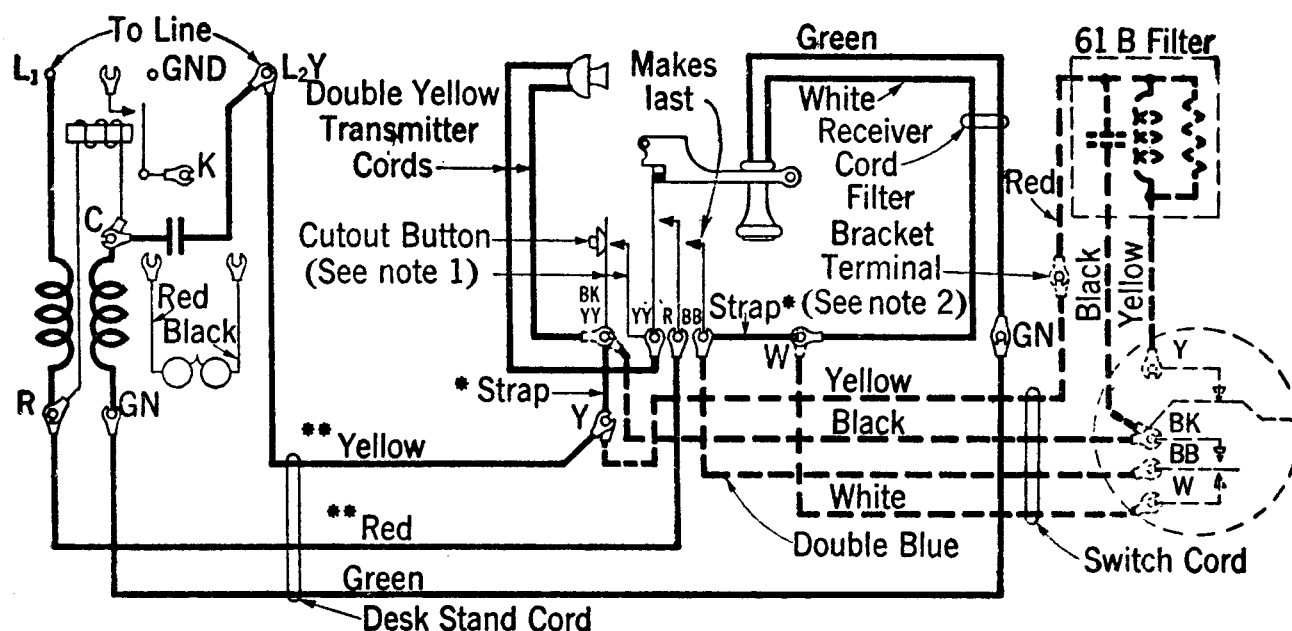

- Remove strap for dial service.

Note 1: These two springs are not provided in the 50AL desk stand.

Note 2: If filter is not provided connect yellow lead from switchhook to Y of dial instead of to filter bracket terminal.

- For sidetone reduction connect yellow to R and red to L2Y

50CM or 50AL Sidetone Desk Stands (Manual and Dial).