


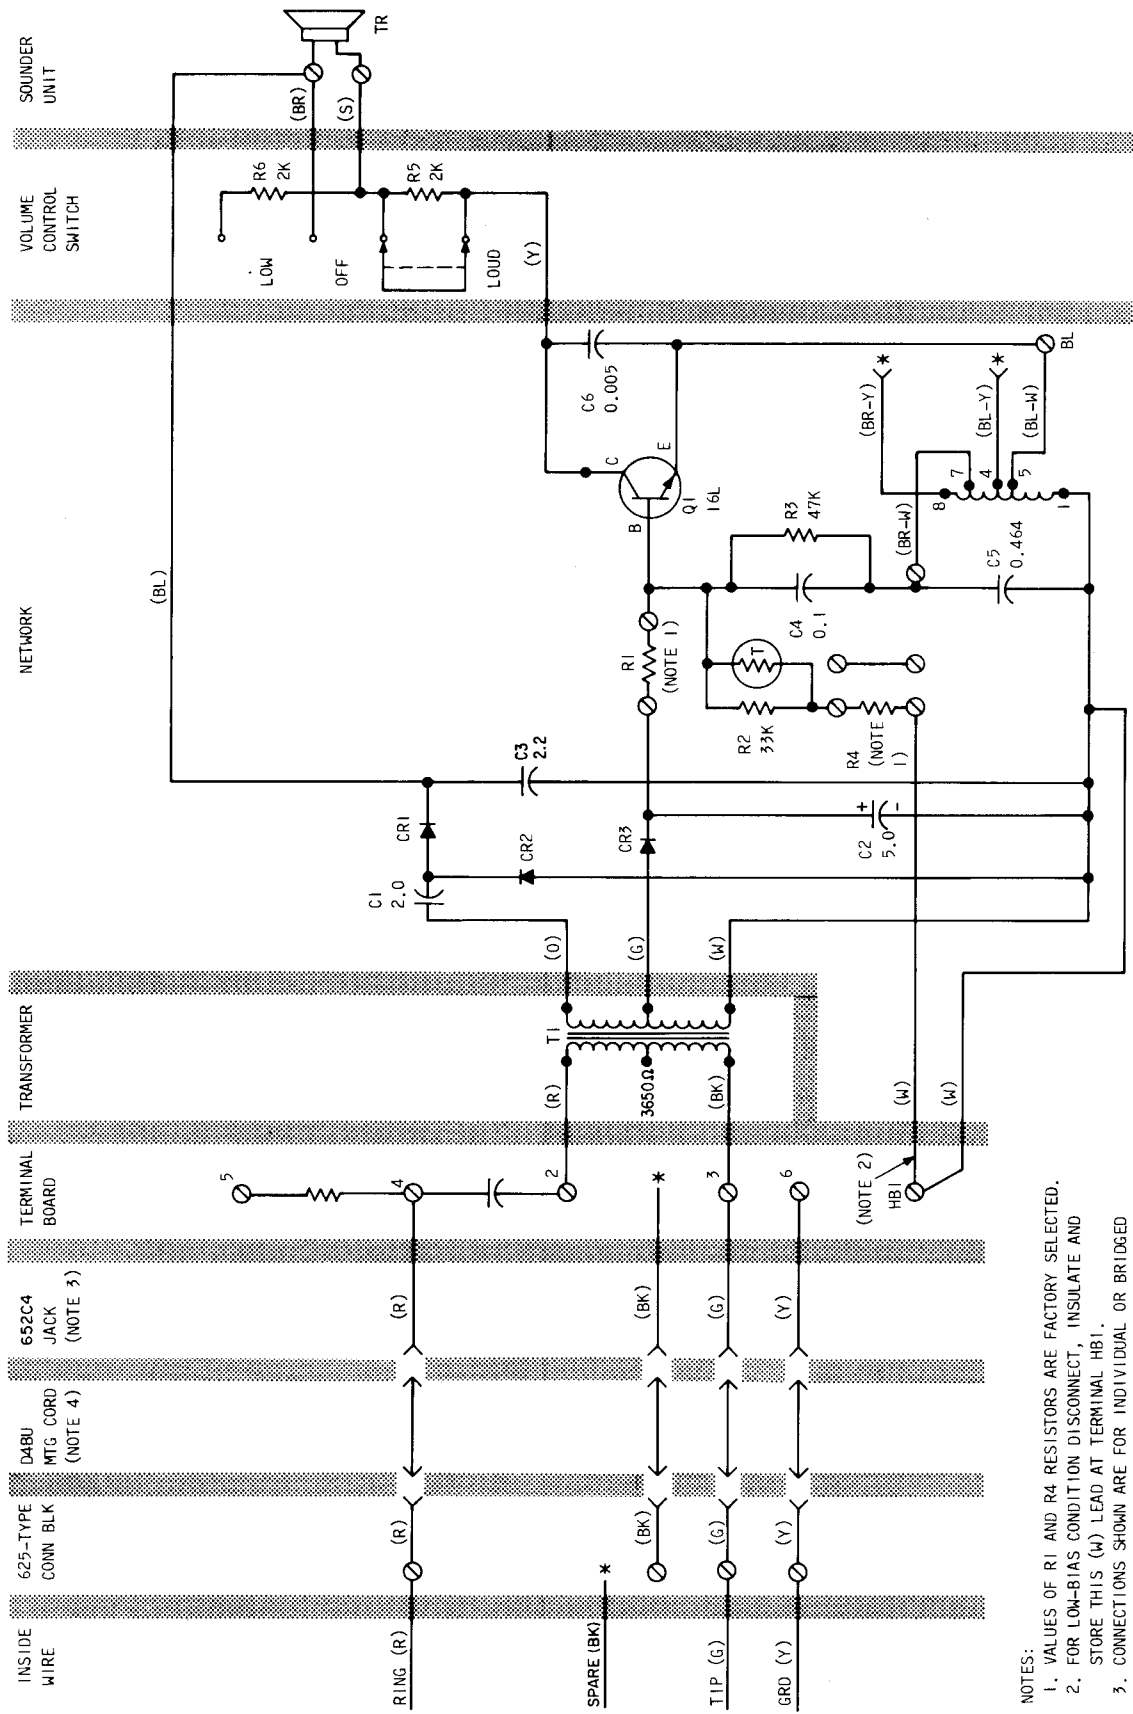

- NOTES:
1. VALUES OF R1 AND R4 RESISTORS ARE FACTORY SELECTED.
 2. FOR LOW-BIAS CONDITION DISCONNECT, INSULATE AND STORE THIS (W) LEAD AT TERMINAL HB1.
 3. CONNECTIONS SHOWN ARE FOR INDIVIDUAL OR BRIDGED RINGING. REFER TO TABLE A FOR ALL OTHER CLASSES OF SERVICE.
 4. MUST BE ORDERED SEPARATELY.
- * INSULATED AND STORED.