

TELEPHONE SETS - 567PB

IDENTIFICATION AND CONNECTIONS

1.00 INTRODUCTION

This section covers identification and internal connections of the 567PB telephone set.

2.00 GENERAL

2.01 The 567PB telephone set is a common battery, desk-type dial, illuminated 6-button key telephone set designed for use with the data set 103A. Its outside appearance is identical to the 565HD-type set.

2.02 Installation and maintenance are covered in sections for the 560-type plug-ended sets. Connection information is covered in the Plant Series section entitled Data Set 103A - Installation and Connections.

3.00 IDENTIFICATION

3.01 This set consists of a C4A ringer, 425E network, G3AR hand set, 7C dial, 589AC key, and D50J mounting cord.

3.02 The 567PB telephone set is available in light gray (-61) only.

3.03 The D50J cord is equipped with a KS-16689, List 1 plug which mates with an A25B connector cable. The cord is 5 feet, 6 inches in length.


3.04 The 589AC key used in the set has six buttons with the following functions:

- DATA - A nonlocking key used to shift from talk to the data mode of operation on the data line.
- TALK - A locking key used to connect telephone set talking circuit to line used for data transmission.
- TEST 1 - A nonlocking key used to test the data set under the direction of the data test center.
- TEST 2 - A nonlocking key used to test the data set under the direction of the data test center.
- LOCAL - A locking key used to enable the data equipment to operate while the data set is on hook.
- AUTO. - A locking key used to enable the data set to automatically answer an incoming data call.

D50J
CORD

TERMINAL
STRIP
ON KEY

51

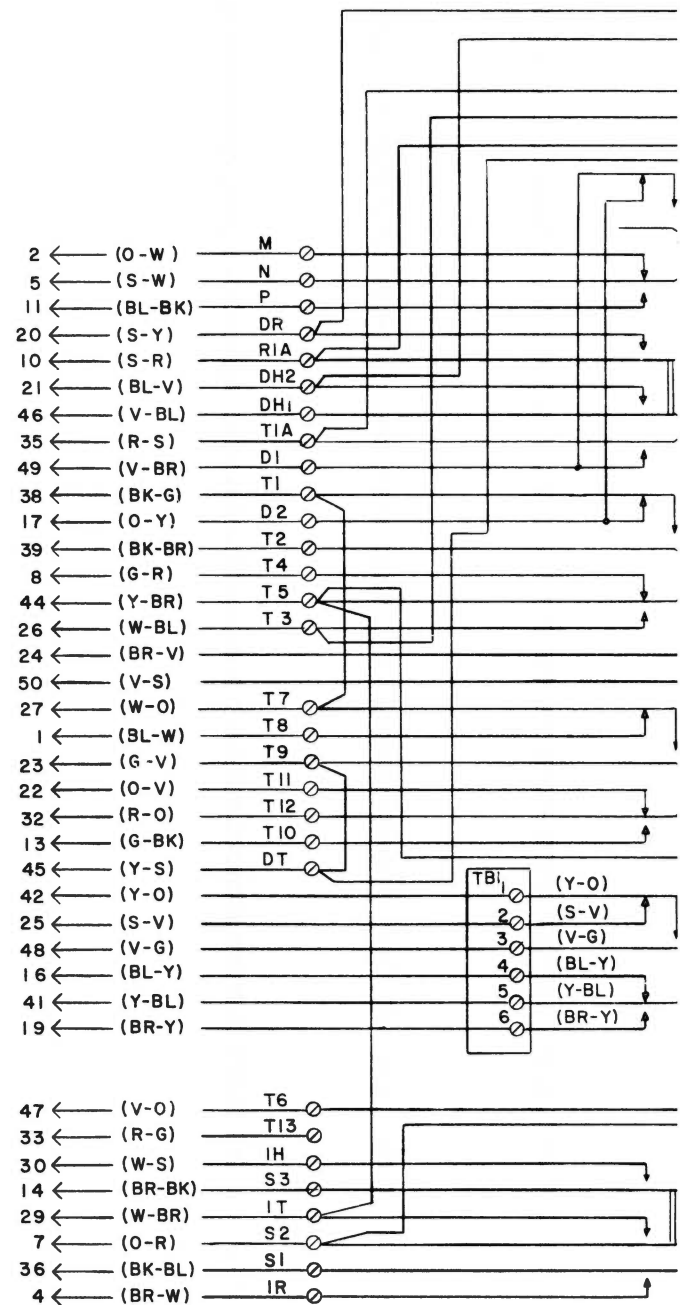

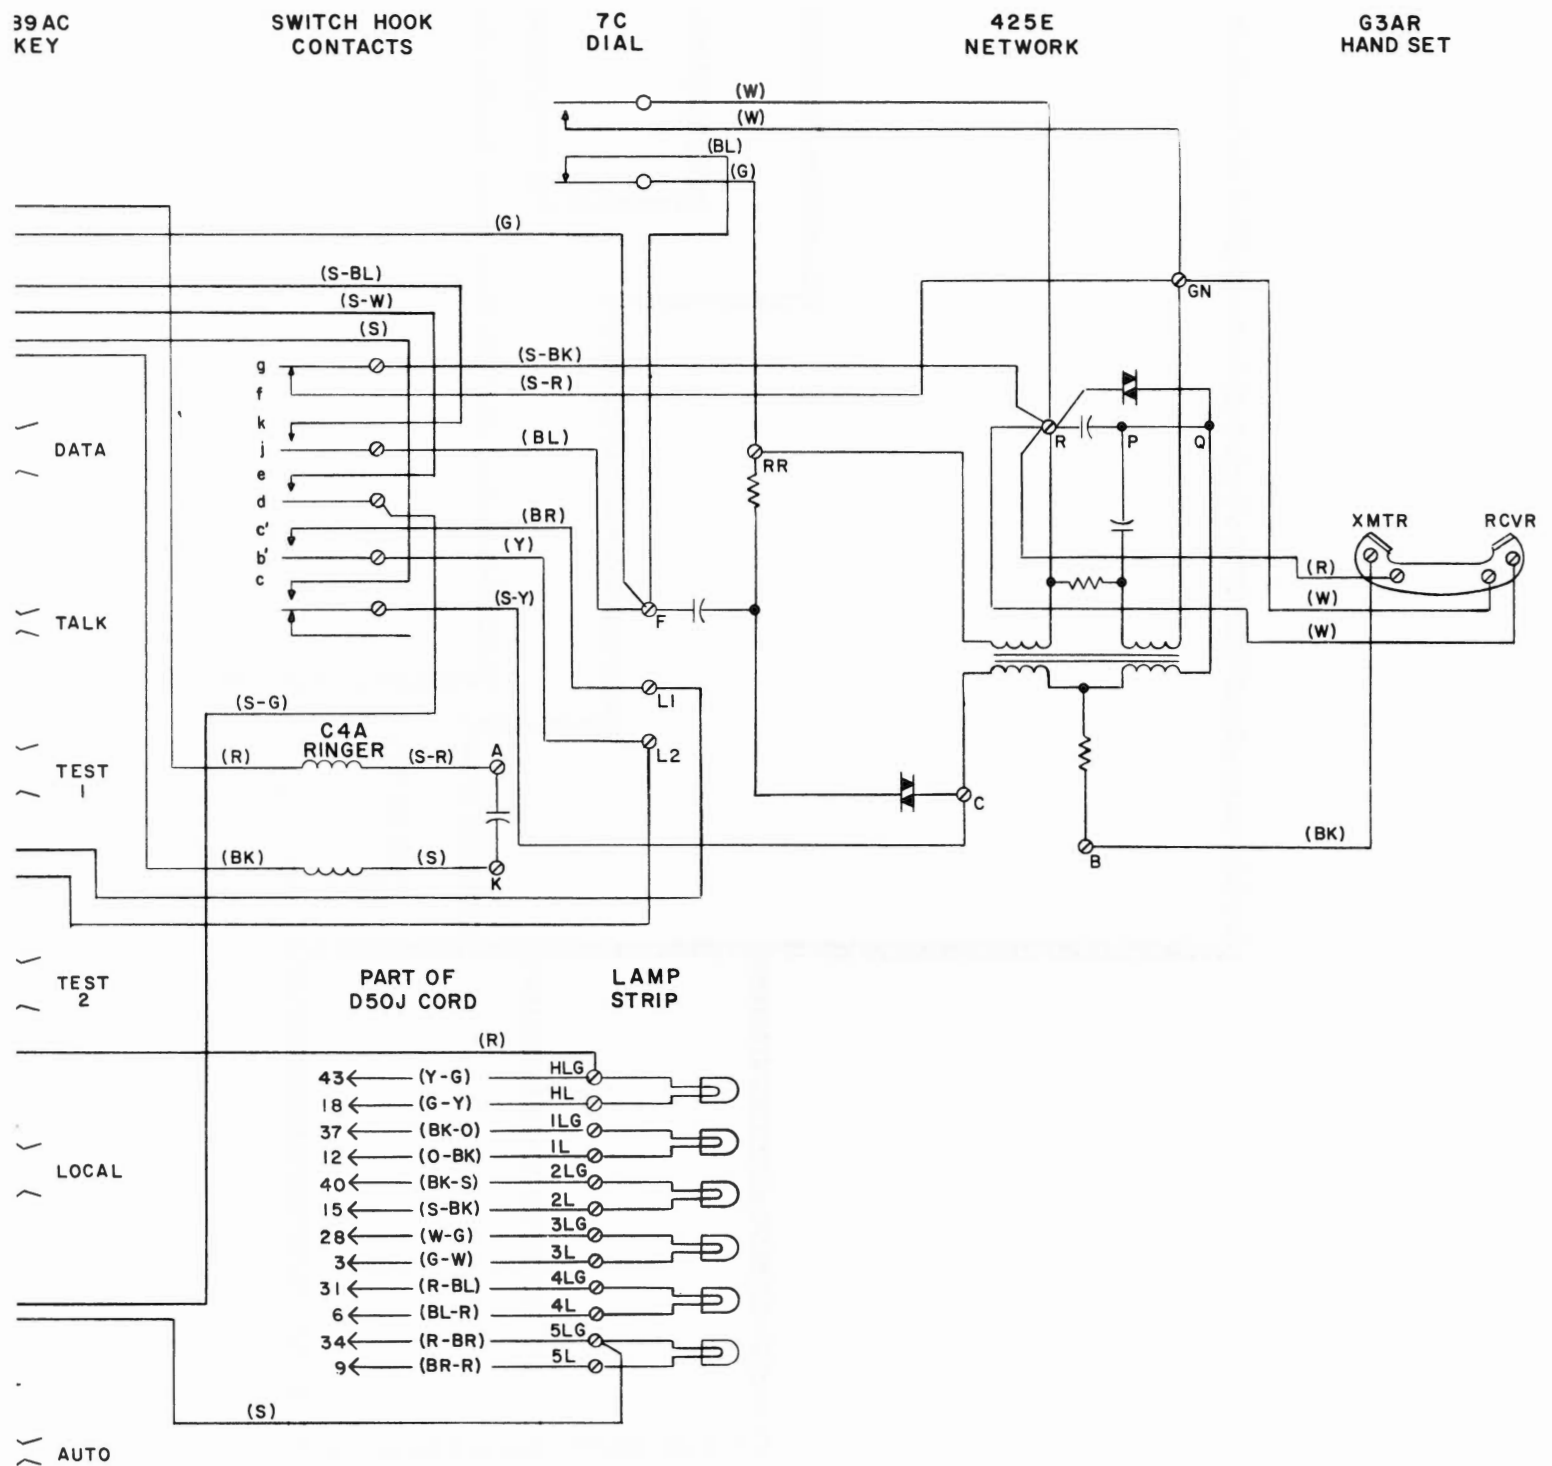


Fig. 1 - 567PB Telephone Set - Connections