

TELEPHONE SETS — 2714A

IDENTIFICATION, INSTALLATION, AND MAINTENANCE

1. GENERAL

1.01 The 2714A telephone set is intended solely for use with specially engineered lines — *not for general telephone use.*

2. IDENTIFICATION

ORDERING GUIDE

Set, Telephone, 2714A-* (Fig. 1 and 2)

(a) Replaceable Components

- Cord, Mounting, D14L-*
 - Dial, 35E4A
 - Form, E-5002A (number card)
 - Key, 638B (line key)
 - Lamp, KS-19387L1
 - Socket, Lamp, KS-19240L2
 - Set, Hand, G3Y-*
 - P-25E803 Card Retainer
 - P-84D9* Housing and Plunger Assembly
 - P-90D054 Guard Assembly
 - P-21F955 Terminal Board
 - P-26E164 Retainer
- } Polarity
Guard
Components

* Refer to Table A for appropriate color suffix.

COLOR

TABLE A
COLORS AND SUFFIXES

COLOR	SUFFIX
Black	-03
Ivory	-50
Green	-51
Red	-53
Yellow	-56
White	-58
Rose Pink	-59
Light Beige	-60
Light Gray	-61
Aqua Blue	-62
Turquoise	-64

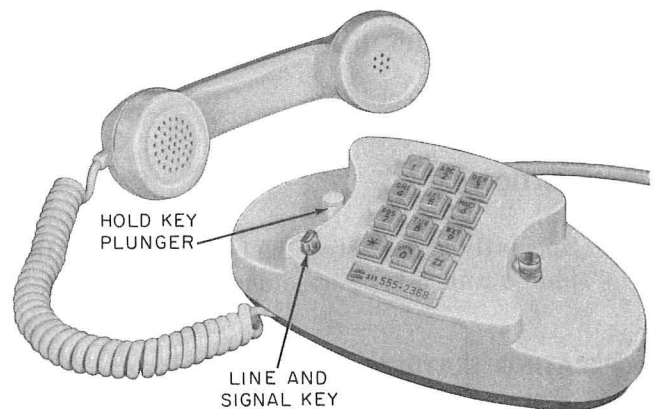


Fig. 1 — 2714A Telephone Set, Exterior

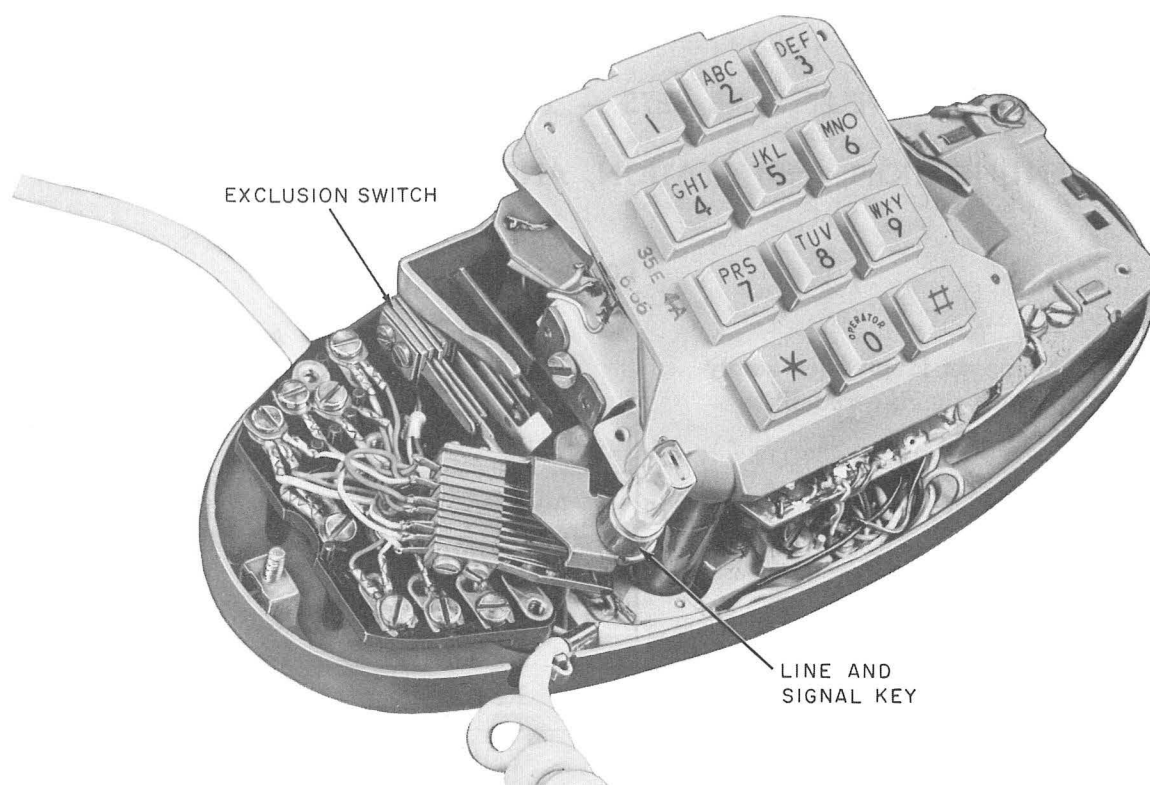


Fig. 2 — 2714A Telephone Set, Interior

DESIGN FEATURES

- Dial-light/night-light (night-light feature may be eliminated by internal wiring change)
- Polarity guard
- Exclusion on line 1
- 2-line pickup
- Six transfer line switch
- G3Y handset

APPLICATION

Specially engineered 1A1 or 1A2 key telephone and 3-type speakerphone systems.

OPERATING FEATURES

- Two position turnkey for line pickup (push for signaling)

- Left line switch plunger operates exclusion switch (pull up to operate exclusion; depress to restore)
- Dial-light intensity decreased with handset on hook (night-light feature)

3. INSTALLATION

(a) *Planning*

- Consider safety for yourself, customer, and maintenance personnel
- Location — desk, table, console, etc.
- User convenience
- General appearance of installation

(b) *Installing*

- Install sets in accordance with standard installation procedures.

- Use electricians scissors or diagonal cutting pliers to remove insulators from stored spade-tipped leads (to avoid stripping tips or damaging conductors) when optional connections are made.

4. MAINTENANCE

- (a) These sets are maintained in accordance with standard procedures for PRINCESS® phone with TOUCH-TONE® calling.
- (b) See appropriate sections for maintenance of individual components such as handsets and dials.