

BACKBOARDS
DESCRIPTION AND USE

1.00 GENERAL

1.01 This section gives a brief description of the various types of backboards and lists their uses in table form. It is reissued to include additional information on color and to bring the section up to date.

1.02 Due to extensive changes, marginal arrows have been omitted.


1.03 Backboards should not be used except where a secure mounting could not be otherwise obtained.

CODE NO.	MATERIAL	FINISH	USE FOR MOUNTING
79	Wood	Black	One type 58, 98, or 106 station protector or two 111A station protectors. 12-1/2 by 5 inches.
81	Wood	Black	Five type 58, 98, or 106 station protectors. 25-1/2 by 12-1/2 inches.
136C	Wood	Black	Type 633 or 653 subs. set. 24-5/16 by 8-1/8 inches with a 6-1/8 inch shelf.
139A-3	Metal	Black	All coded multislot coin collectors for a horizontal surface. 17-3/16 by 8 inches, irregular, with 8 by 7-1/4 inch base.
144D	Wood	Black	All coded multislot coin collectors and a subs. set. 27-5/16 by 5-15/16 inches, irregular. Holes for mounting coin collectors fitted with Dot Tee nuts using P-210235 screws (1/4-20 by 1-inch FH steel machine screws). Screws not furnished with backboard. Replaces 144C backboard.
146A	Metal	Black	Type 433, 633, or 653 subs. set either with or without a 148A backboard. To be used when writing space is required. 6-3/4 by 9-1/2 inches with a 7-1/2 by 6-3/64-inch shelf.
147A	Wood	Black	Type 433, 633, 634, or 653 subs. set or a type 50 recorder-connector on a wall or over an outlet. Use with metal subs. set on metal lathed or sheathed walls as protection, and with masonry or brick walls where the surface does not allow easy location of holes for the screws in the subs. set. 9-9/16 by 7-1/8 inches.
148A 148B	Wood	Black	Type 433, 434, 633, 634, or 653 subs. set and a 7A or 7J coin collector. When writing space is required, the 148A backboard can be used in combination with a type 433, 633, or 653 subs. set and a 146A backboard. In this case the coin collector, if required, is mounted separately on a 150A backboard. The 148A backboard is 18-13/16 by 7-1/8 inches and the 148B is 18-1/4 by 7-1/8 inches.

SECTION C37.201

CODE NO.	MATERIAL	FINISH	USE FOR MOUNTING
154A	Wood	Black	Type 684, 685, 686, and 687 subs. sets on a wall or over an outlet. 7-11/16 by 6 inches.
155A	Metal	Black	Type 634 subs. set on a wooden baseboard. 12-3/8 by 6-13/16 inches, irregular.
156A	Metal	Black	Type 684 subs. set on a wooden baseboard. 10-1/2 by 5-5/8 inches, irregular.
158A	Wood with Metal Shelf	Black	Wall set and keys, lamp indicators, push buttons, etc. at 750A and 755A PBX, and 15A and 23A key equipment stations. 21-1/2 by 7 inches.
KS-5796,L1 KS-5796,L7	Wood	Black Beige	One 105A apparatus box. Replaces 160A. 7-1/4 by 7-3/4 inches.
KS-5796,L2 KS-5796,L8	Wood	Black Beige	Two 105A apparatus boxes. Replaces 161A. 16-13/32 by 7-3/4 inches.
KS-5796,L3 KS-5796,L9	Wood	Black Beige	Three 105A apparatus boxes. Replaces 162A. 25-3/16 by 7-3/4 inches.
163A	Phenol Fiber	Black	Type 14A or 20A indicator. 4-7/32 by 2-7/32 inches.
164A	Wood	Black	Type C or G hand telephone set mountings (hanging handset), No. 1, 2, 3, or 4 directory hangers. 4-1/2 by 3 inches.
165A	Wood	Black	KS-5250, J86205A, and J86205B rectifiers and type 50 recorder-connector. 11-3/4 by 7-3/4 inches.
166A	Metal	Galvanized	Type 320 telephone set. 7-19/64 by 7-19/64 inches.
167A-3	Metal	Black	All coded multislot coin collectors in a corner of telephone booth. 17-7/8 by 7-3/8 by 3-5/8 inches, irregular. Replaces 153A-3 backboards.
168A-4	Wood	Ivory	One 11, 12, 40, 42A-4, or 44A connecting block on masonry or uneven surfaces. 3-7/8 by 2 inches.
168A-9	Wood	Brown	One 11, 12, 40, 42A-9, or 44A connecting block on masonry or uneven surfaces. 3-7/8 by 2 inches.
168B-4 168B-9	Wood	Ivory Brown	Two or three 44A connecting blocks on masonry or uneven surfaces or over an outlet. 5-1/2 by 3-7/8 inches.
168C-4 168C-9	Wood	Ivory Brown	Four type 44A connecting blocks on masonry or uneven surfaces or over an outlet. 7-3/8 by 3-7/8 inches.

CODE NO.	MATERIAL	FINISH	USE FOR MOUNTING
169A	Metal	Steel Gray	Type 592 subs. set where protection from weather and insects is desired. Metal box with hinged cover. 9-7/8 by 10-3/8 by 2-5/8 inches.
170A	Wood	Unfinished	Mounting KS-6486 card frame in type No. 9 booths having depressed back panels. 11-5/8 by 4-13/16 inches.
171A	Wood	Black	Type 531 or 592 subs. set, 6-3/8 by 4-13/16 inches.
172A-3 172A-4	Wood	Black Ivory	Type 354, 356, or 357 subs. set on walls or over an outlet. 10 by 5-5/8 inches.
172B-3 172B-50 172B-51 172B-52 172B-53 172B-54 172B-55 172B-56 172B-57	Wood	Black Ivory Green Gray Red Brown Beige Yellow Blue	Type 354, 356, 357, 554, 556, or 558 wall telephone set. Same as 172A but with additional wire holes to accommodate the type 554, 556, or 558 telephone set. The 172A may be modified in the field by drilling the required holes as shown in Fig. 1.

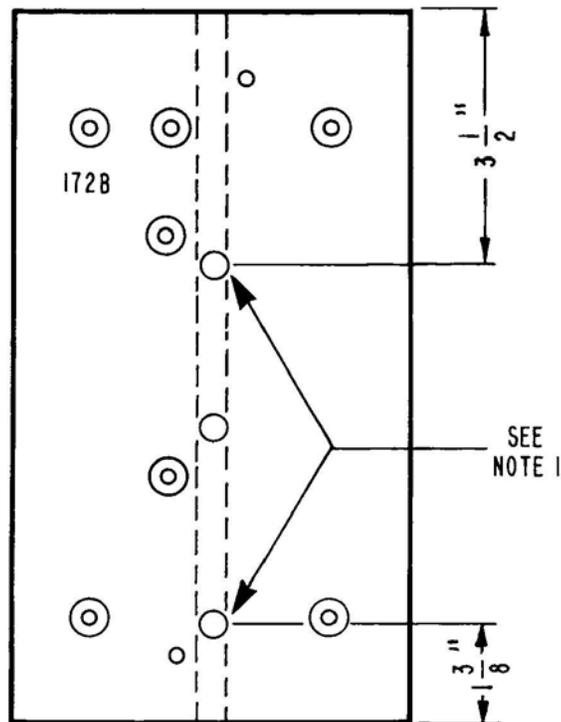

Note: These 3/8-inch holes are not provided in the 172A, but may be drilled in the field to accommodate type 554, 556, or 558 telephone sets. The top hole is usually provided for the type 558 set, and the bottom hole for types 554 and 556 sets.

FIG. 1 — 172B BACKBOARDS