

PARTS IDENTIFICATION AND LIST

S-C 1704-3AT AND 1704-3BT

3-LINE TONE-DIAL® TELEPHONES



S-C 1704 3-Line TONE-DIAL Telephone

1. INTRODUCTION

a. This section covers identification of parts and parts lists for the following telephones:

S-C 1704-3AT — 3-Line Desk with spade-ended line cords.

S-C 1704-3BT — 3-Line Desk with plug-ended line cords.

b. This section is new.

2. RELATED SECTIONS

T-8300 Connections and Maintenance, 1704-3AT and 1704-3BT.

T-8975 Maintenance, Parts Identification and List, Pushbutton Key Assemblies.

T-9100 Maintenance, Parts Identification and List, S-C 35A3 TONE-DIAL.

T-8951 Maintenance, Parts Identification and List, No. G-3 Handset.

3. RINGERS

a. S-C Series 20A, Straight-Line Ringer — 702100-244.

b. S-C Series 20J, 60 Hz Ringer — 702100-260.

c. No. 95 Tone Ringer — 702100-488.

d. No. 96A Common Audible Signal — 202100-155.

e. S-C 687 (96A) Ringer Box External Mount — 200076-755.

f. S-C 687 (T) Ringer Box, External Mount — 200076-795.

g. O-E Buzzer — 206289-681.

h. No. 7 Buzzer Mounting Package Assembly — 206289-671. The No. 7 Buzzer is not included in the assembly.

i. S-C Q-20 Buzzer.

j. S-C 687 (CR) 8-24 V ac Control Relay, External Mount — 294003-359.

k. S-C No. 2A Buzzer Assembly — 206014-621.

4. TELEPHONE PARTS LISTS

Order individual parts for the 1704-3AT and 1704-3BT telephones from the following lists. See figure 1, Identification of Parts.

COLOR COMPONENTS FOR 1704-3AT AND 1704-3BT TELEPHONES

<i>ITEM NO.</i>	<i>DESCRIPTION</i>	<i>COLOR</i>	<i>TELEPHONE USED ON</i>	<i>STOCK NO.</i>
1	Housing	Ivory	1704-3AT, 1704-3BT	303120-506
		Black	1704-3AT, 1704-3BT	303120-509
		White	1704-3AT, 1704-3BT	303120-510
		Beige	1704-3AT, 1704-3BT	303120-514
		Green	1704-3AT, 1704-3BT	303120-522
		Gray	1704-3AT, 1704-3BT	303120-523
*2	Handset	Ivory	1704-3AT, 1704-3BT	200737-106
		Black	1704-3AT, 1704-3BT	200737-109
		White	1704-3AT, 1704-3BT	200737-110
		Beige	1704-3AT, 1704-3BT	200737-114
		Green	1704-3AT, 1704-3BT	200737-122
		Gray	1704-3AT, 1704-3BT	200737-123
3	Line Cord Spade-Ended	Black	1704-3AT	200319-809
		Beige	1704-3AT	200319-814
		Green	1704-3AT	200319-822
		Gray	1704-3AT	200319-823
	Line Cord Plug-Ended	Black	1704-3BT	200319-909
		Beige	1704-3BT	200319-914
		Green	1704-3BT	200319-922
		Gray	1704-3BT	200319-923

COMMON PARTS FOR 1704-3AT AND 1704-3BT TELEPHONES

<i>ITEM NO.</i>	<i>DESCRIPTION</i>	<i>STOCK NO.</i>
4	Bezel	300972-251
5	Face Plate	303948-318
6	Facemat, white	303980-731
7	Facemat Package Assembly	206289-531
	Facemat, Blue	300980-741
	Facemat, Green	300980-751
	Facemat, Gold	300980-761
	Facemat, Silver	300980-771
	Designation Cord, Lamp Shield	300979-911
	Station No. Card	300001-911
8	Base Assembly	206014-541
9	Signal and Recall Switch Assembly	206014-501
10	Hookswitch Assembly	200129-599
*11	395A Key Assembly	206011-501
*12	S-C 35A3 Dial Assembly	200052-921
13	Network Assembly	206013-391
14	Terminal Board Assembly	206014-511
15	Lever Plate	300973-271
16	Connecting Plate	300973-281
17	Connector Plug (female)	304146-951
18	Connecting Rod (long)	300973-291
19	Connecting Rod (short)	300973-301
20	Spring	300971-061
21	Shaft	300971-681
22	Hook	300977-691
23	Stop Plate	300980-191
24	Bearing	300973-311
25	Indexing Pin	300973-731
26	Key Mounting Bracket	300971-711
27	Dial Mounting Bracket	300980-121
28	Network Mounting Bracket	300980-131
29	Housing Bracket	300971-871
30	Spacer	300973-701
31	Cable Clamp	540201-005

COMMON PARTS FOR 1704-3AT AND 1704-3BT TELEPHONES (Cont)

<i>ITEM NO.</i>	<i>DESCRIPTION</i>	<i>STOCK NO.</i>
32	Housing Clip	300971-861
33	No. 3-48 x 1/4 RHIMS Screw	501252-000
34	No. 4-40 Screw (Special)	300974-461
35	No. 4-40 x 3/16 BHIMS Screw	502172-000
36	No. 6-32 x 3/16 PHIMS (SEMS) Screw	213821-000
37	No. 6-32 x 1/4 PHIMS (SEMS) Screw	540383-345
38	No. 6-32 x 5/16 OHIMS Screw	503792-000
39	No. 6-32 x 5/16 Thd. Cut Screw	300970-691
40	No. 6-32 x 5/16 PHIMS Screw	540135-346
41	No. 6 Washer	525532-000
42	Manual Exclusion Package Assembly	204793-891
43	No. 7 Buzzer Mounting Package Assembly Does not include buzzer, (not shown)	206289-671
44	Polarity Guard Package Assembly (not shown)	206290-561

- * *Notes.*
- 1. For breakdown of 395A Key Assembly see T-8975, Maintenance and Parts Identification and List, Pushbutton Key Assemblies.*
 - 2. For breakdown of S-C 35A3 TONE-DIAL see T-9100, Maintenance and Parts Identification and List, S-C 35A3 TONE-DIAL.*
 - 3. For breakdown of the No. G-3 Handset see T-8951, Maintenance and Parts Identification and List, No. G-3 Handset.*

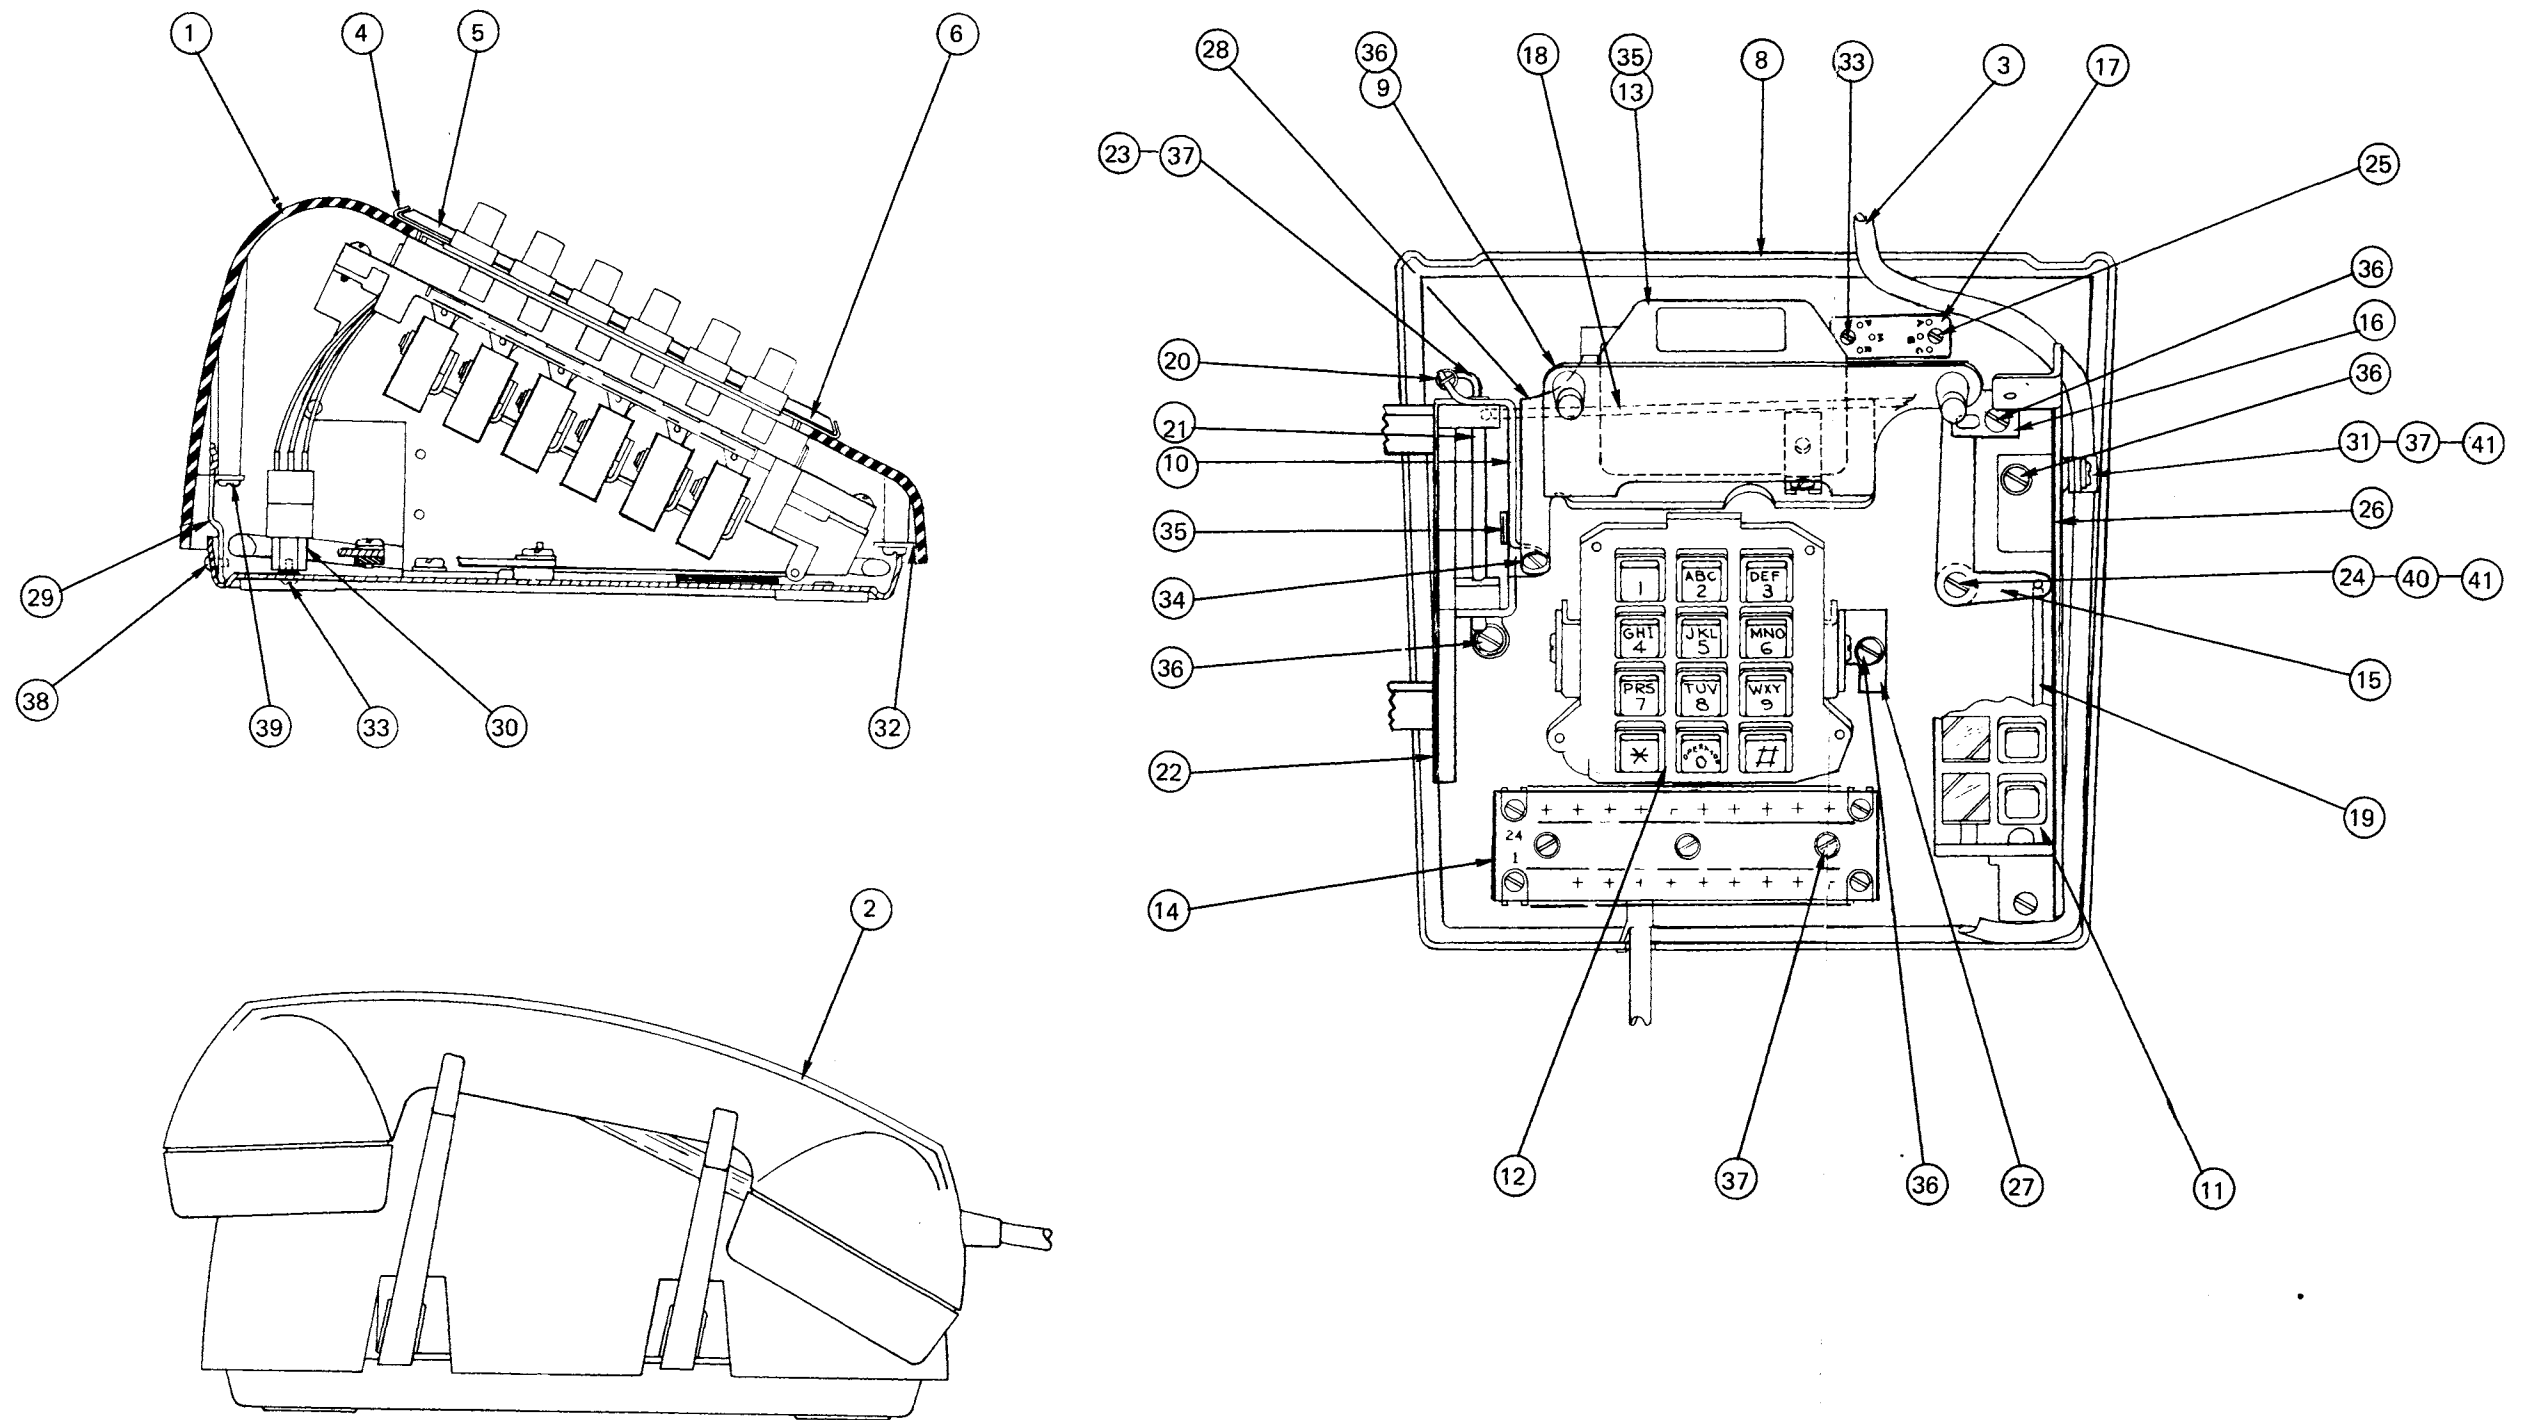


Figure 1. Identification of Parts, 1704-3AT and 1704-3BT.