

DROP AND BLOCK WIRING

DROPS FROM OPEN AND RURAL WIRE LINES

1. GENERAL

- 1.01** This section covers methods of bridling to open wire.
- 1.02** This information was formerly covered in Section 625-240-200CA (G32.129.1) which is canceled.
- 1.03** Fuseless protectors for stations will be specified by service orders or other local instructions.

2. DISTRIBUTING DROPS FROM OPEN WIRE LINES

- 2.01** Distribute drops from a drive hook in the pole if climbing space, joint use, and ground clearances permit, and there is adequate clearance between the drops and existing or future open wires. Otherwise distribute drops from crossarms as outlined in 2.02.
- 2.02** Distribute drops from crossarms as follows:
- (a) Crossarms Other Than DE Type: Distribute from a drop wire hook where not more than two drops will be run from the same point on the crossarm. Distribute from a guard arm hook where more than two drops will be run. Not more than five drops shall be attached to one guard arm hook.
 - (b) DE Crossarm: Distribute drops from drop wire hooks attached to the sides of the crossarm.

3. INSTALLING DROP WIRE AND GUARD ARM HOOKS ON CROSSARMS

- 3.01** Attach drop wire hook to crossarm with a 1-1/2 inch No. 18 RH galvanized wood screw. On a crossarm equipped with insulator pins, center the hook on side of crossarm and between pins as covered in 4.10 or closer to the pole if adequate clearances can be obtained and climbing space is not obstructed. On a crossarm on which the open wires are terminated on dead-end brackets, locate the hook midway between

the two outer bracket positions and 1-1/8 inches above bottom of crossarm. Shift location of hook as necessary to avoid checks or cracks in crossarm. Drill lead hole for the No. 18 wood screw with an 11/64-inch drill point.

- 3.02** Place guard arm hook in a 9/16- or 5/8-inch clearance hole drilled in the side of the crossarm (3-1/4 inches thick). Center the hole between top and bottom of the arm and between pins or closer to the pole if adequate clearances can be obtained and climbing space is not obstructed.

4. WIRING AT CROSSARMS AND POLES

General

- 4.01** Terminate parallel drop wire at a 101B2 wire terminal and run twisted pair wire between the terminal and the open wire. Follow this method when making new installations, re-installations, rearrangements, and repairs.
- 4.02** If the drop is run with HD wire, the 101B2 wire terminal is not required, as this wire may be connected directly to the open wire.
- 4.03** Locate the 101B2 terminal on pole side of crossarm with lower edge $\frac{3}{4}$ inch above bottom of crossarm. Locate the first terminal to be placed between the first and second wires from the pole so that it will be readily accessible. Space additional terminals $2\frac{1}{2}$ inches apart on other crossarms.
- Note:* To avoid splicing out parallel drop wires installed prior to placing the 101B2 terminal or to comply with distances specified in Part 7, the terminal may be located between any pin positions.
- 4.04** The binding posts of the 101B2 terminal will accommodate three parallel drop wires and the bridle wire to the open wire. (The superseded 101B terminal will accommodate the same number of drop wires).

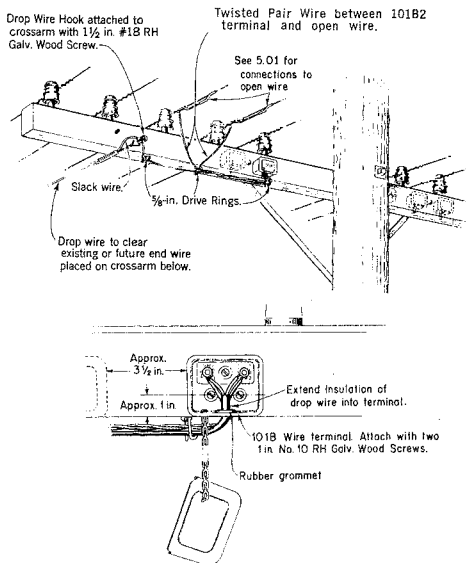


Fig. 1 — Where Drop Wire Is Distributed from Crossarms Other than DE Type

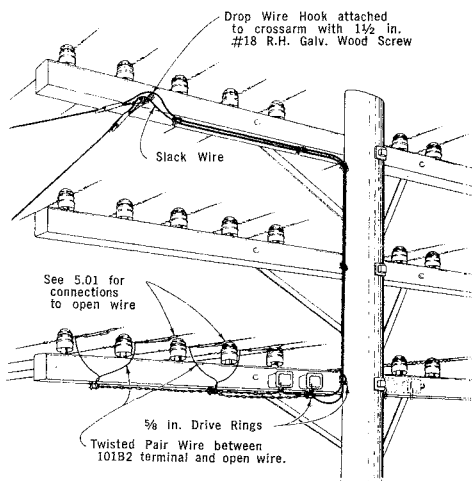


Fig. 2 — Where Drop Wire Is Distributed from a Higher Crossarm on a Pole

4.05 Terminate twisted pair wire under the bottom washers on the binding posts, and the first parallel drop wire between the second and third washers and so on.

4.06 If four drop wires are to be bridged to the same open wire, install two 101B2 terminals and bridle from each terminal to separate bridging sleeves or bridging connectors spaced approximately 2 inches apart on the open wire.

4.07 Install $\frac{5}{8}$ inch drive rings on underside of crossarm near the point where the drop is attached and at points where wires extend to the open wire at the 101B2 terminals. Install additional rings as required to limit ring spacings to approximately 20 inches.

4.08 Use B bridle wire for bridling between 101B2 terminals and open wire except where the use of block wire is specified as in Part 7 or by local instructions. Use bridging sleeves or bridging connectors for connection to open wire.

4.09 At double crossarms equipped with insulator pins follow the general wiring method specified for single crossarms, locating the 101B2 terminal preferably on the side of the crossarm toward the bridging sleeves or bridging connectors. Locate the wire run on the underside of the same crossarm.

Crossarms Equipped with Insulator Pins

4.10 The wiring arrangement on crossarms equipped with insulator pins is illustrated in Fig. 1, 2, and 3.

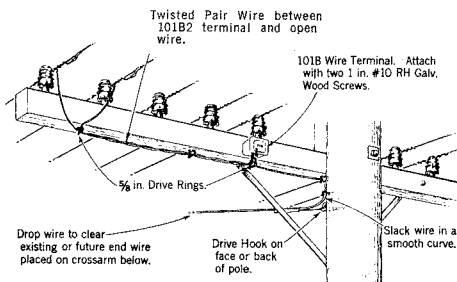


Fig. 3 — Where Drop Wire Is Distributed from a Pole

4.11 Crossarms Equipped with Deadend Brackets (Fig. 4).

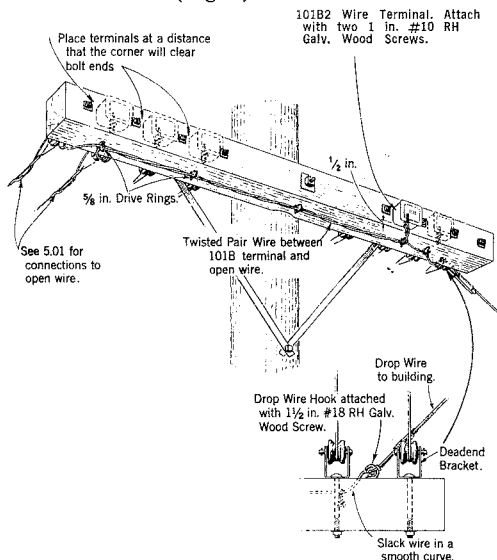


Fig. 4 — Wiring Arrangement on DE Crossarms Not Having Back Braces

4.12 The wiring arrangement on DE crossarms equipped with back braces is illustrated in Fig. 5 and 6.

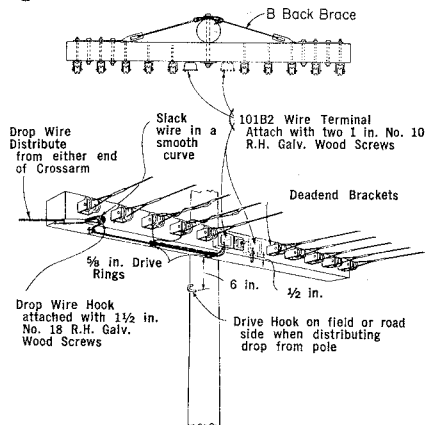


Fig. 5 — For Not More than Two Drops Use 101B Wire Terminals Placed on Line Wire Side of Crossarm

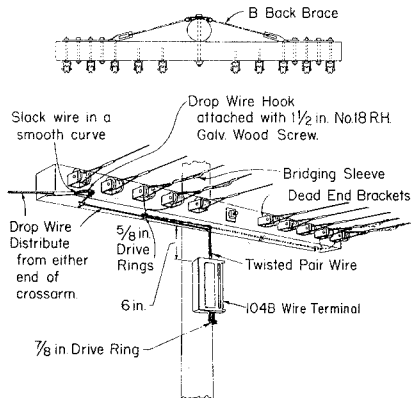


Fig. 6 — For More than Two Drops Use a 104B Wire Terminal Mounted on Pole 6 Inches Below Arm

4.13 At double crossarms equipped with dead-end brackets, follow the general wiring method shown in Fig. 4, locating the 101B2 terminal on the outer side of the crossarm not equipped with deadend brackets. Locate the wire run on the underside of the same crossarm.

Poles Equipped with Wooden Pole Brackets

4.14 The wiring arrangements on line poles equipped with wooden pole brackets are illustrated in Fig. 7 and 8.

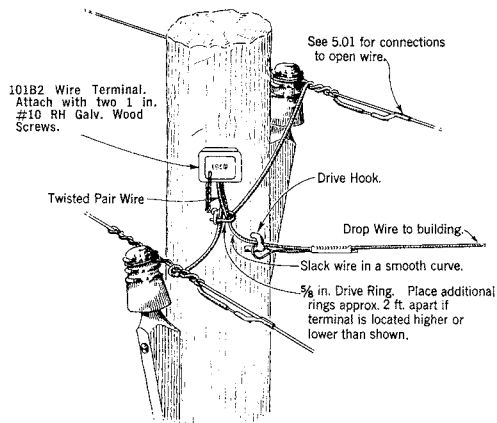


Fig. 7 — Where Pole Brackets Are Located on Opposite Sides of Pole

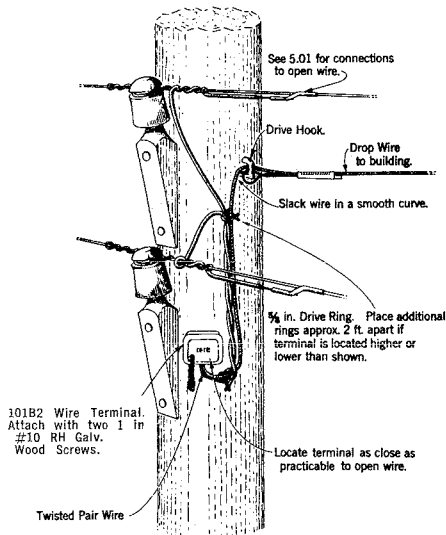


Fig. 8 — Where Pole Brackets Are Located on Same Side of Pole

4.15 Poles Equipped with Deadend Brackets (Fig. 9)

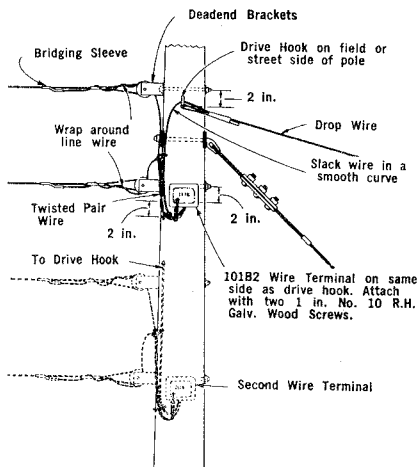


Fig. 9 — Where Lines Are Terminated on Deadend Brackets Attached to Face or Back of a Pole

5. CONNECTING TWISTED PAIR WIRE TO OPEN WIRE

5.01 In general, connect twisted pair wire to open wire attached to glass insulators or deadend brackets as illustrated in Fig. 10, 11, and 12.

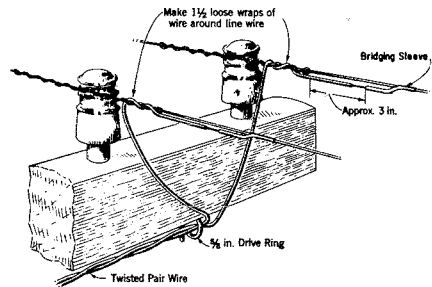


Fig. 10 — Where Line Wires Are Tied to Pin-Type Insulators

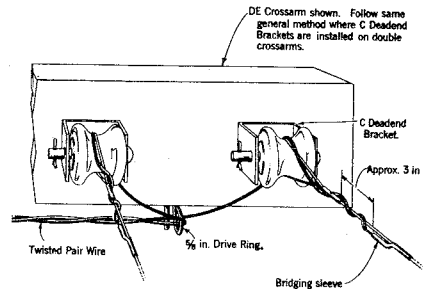


Fig. 11 — Where Line Wires Are Terminated on Deadend Brackets

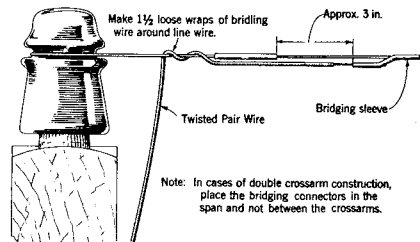


Fig. 12 — Where Line Wires Are Terminated on Pin-Type Insulators

5.02 Connect bridle wire to tree wire, using one of the methods covered for bare line wire, depending on the exposure conditions involved. Remove sufficient insulation from the tree wire to permit making the connection as specified for bare line wire.

6. INSTALLATION OF WIRE VIBRATION DAMPER

6.01 Install vibration dampers as covered in Section 623-030-103CA where open wires vibrate to such an extent as to cause breakage of twisted pair wires at bridging points or to produce a vibration noise at a building to which a drop wire is attached.

7. BRIDLING WHEN FUSELESS PROTECTORS ARE USED AT STATION

7.01 Where stations served from open wire or rural wire will use the fuseless protector, 123A1A, a length of Z block wire not less than

2 feet shall be used between the drop wire and open or rural wire in accordance with the examples in Fig. 13 through 17. Bridging to 109 size steel wire or 104 size copper steel wire may be made with a 109 x 036 Galvanized Bridging Sleeve.

Note: Z Block Wire shall have at least one right angle bend in it.



- Note: 1. Crimp H Splice Sleeve to D Block Wire with Sleeve Pressing Tool, and flatten ridges.
2. Insert .034H Splice Sleeve with D Block Wire in 109 x 109 B Aluminum Bridging Sleeve.
3. Crimp Bridging Sleeve with Q Groove of QC Nicopress Tool.
Do Not Use Sleeve Rolling Tool

Fig. 13 — B Aluminum Bridging Sleeve

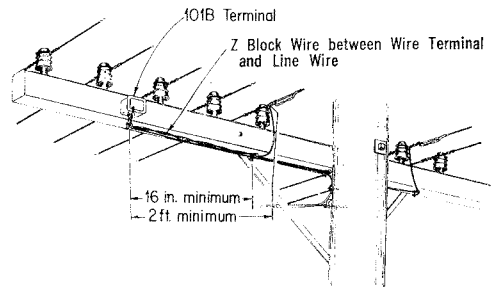
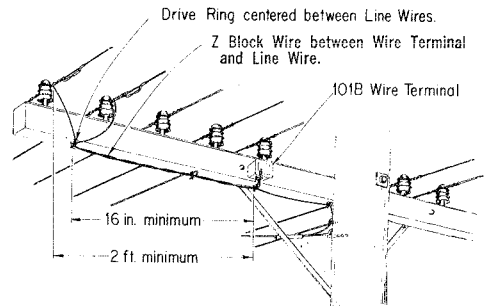


Fig. 14 — Open Wire on Crossarm

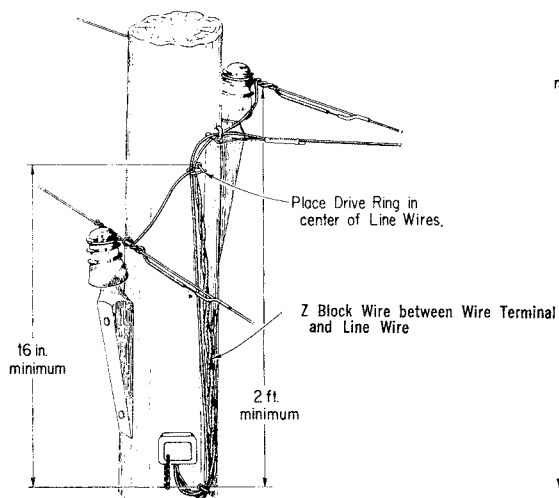


Fig. 15 — Open Wire on Brackets, Same Side of Pole


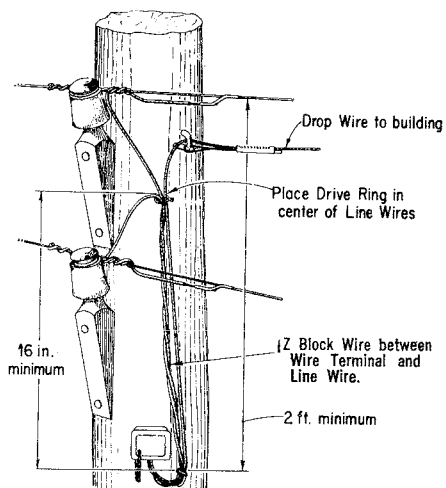


Fig. 16 — Open Wire on Brackets

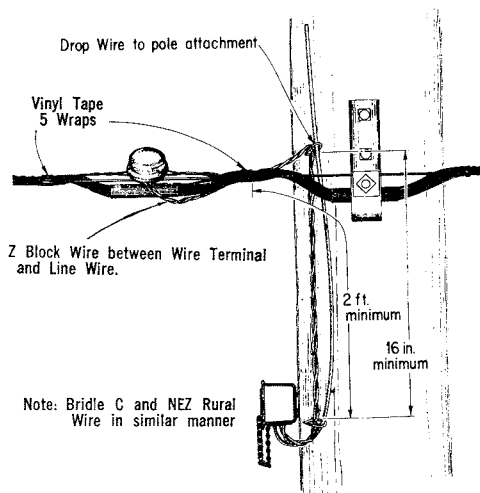

Note: Bridle C and NEZ Rural Wire in similar manner

Fig. 17