

TELEPHONE SETS — 712B

CONNECTIONS

TABLE A

MODIFICATION FOR 2-LINE PICKUP, EXCLUSION ON LINE 1,
AND SIGNALING (USED WITHOUT 1A1 OR 1A2 KTS)

WIRE OR LEAD	COLOR	REMOVE FROM		CONNECT TO		INSULATE AND STORE
		TERM. STRIP	NET.	TERM. STRIP	NET.	
Line Switch	Y	E1			A	
	BR	E1			G	
638A Line Key	S	8				.
	W	7			A	
Exclusion Switch	BR	1		E1		
	W	3		8		
	Y			1		
	BL			E1		
	S			10		
	O			7		
D14L Mtg Cord	V-G		RR		A	

TABLE B

MODIFICATION FOR 1-LINE PICKUP, CUTOFF FEATURE FOR
EXTENSION STATION OR EXTERNAL LINE RINGER

WIRE OR LEAD	COLOR	REMOVE FROM		CONNECT TO		INSULATE AND STORE
		TERM. STRIP	NET.	TERM. STRIP	NET.	
Line Switch	BR	E1		8		
Exclusion Switch	BR	1				.
638A Line Key	R	1				.
	W-O		G	E1		
Strap (M1W Cord or equivalent)				3 ← → F		

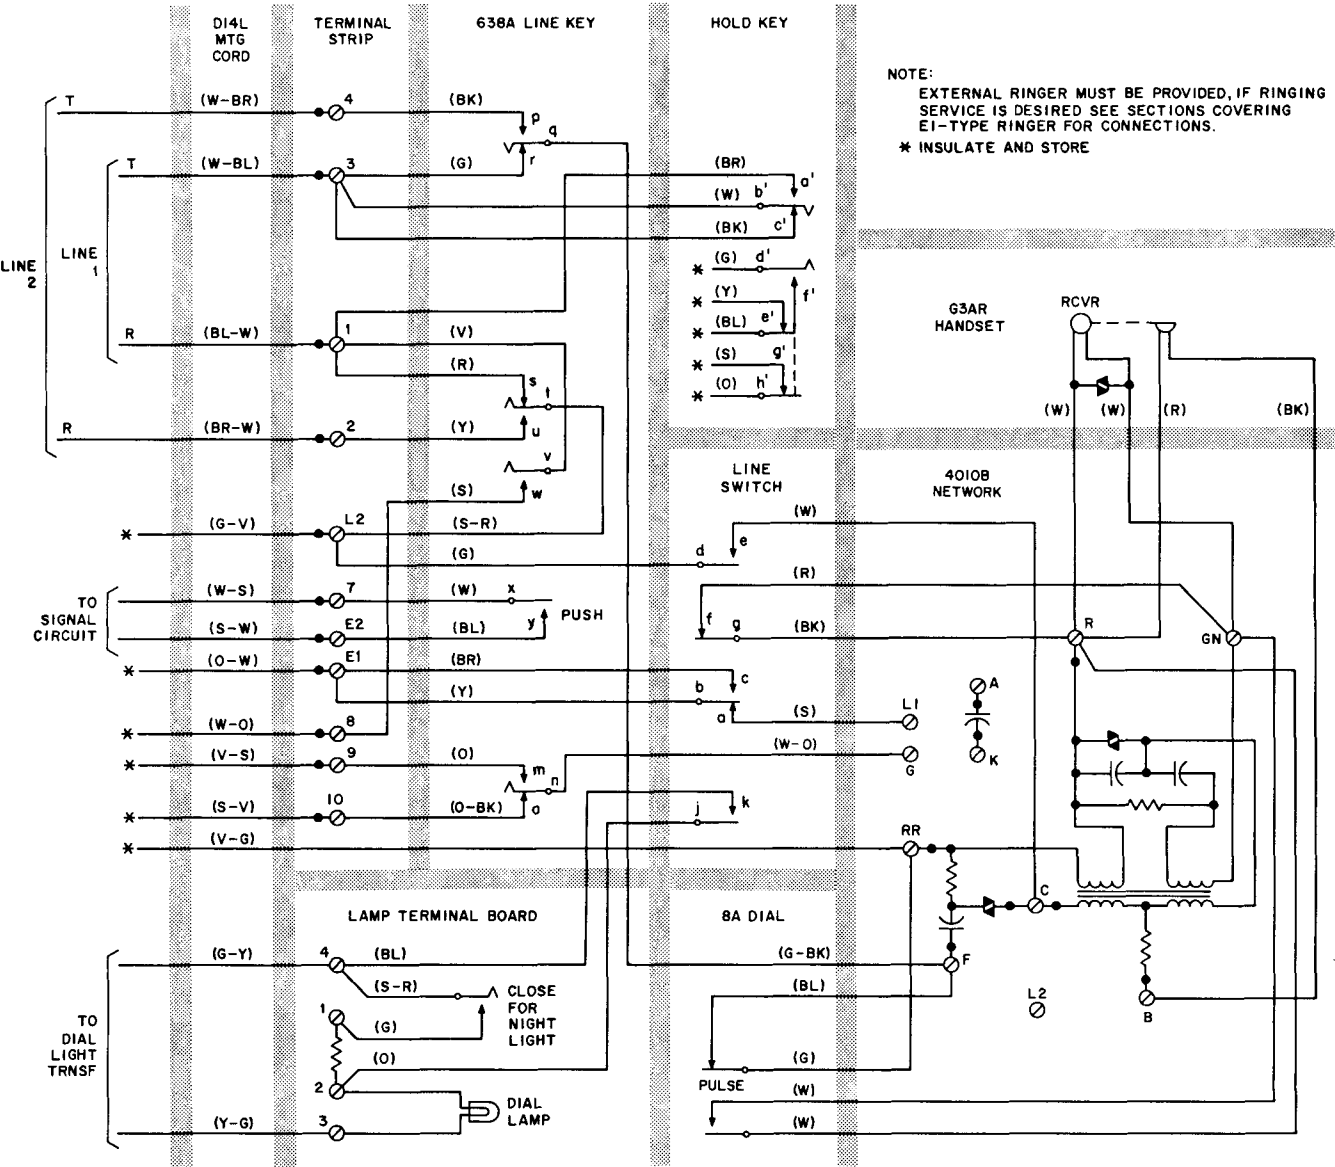


Fig. 1—712B Telephone Set, Wired for 2-Line Pickup, Hold on Line 1, and Signaling

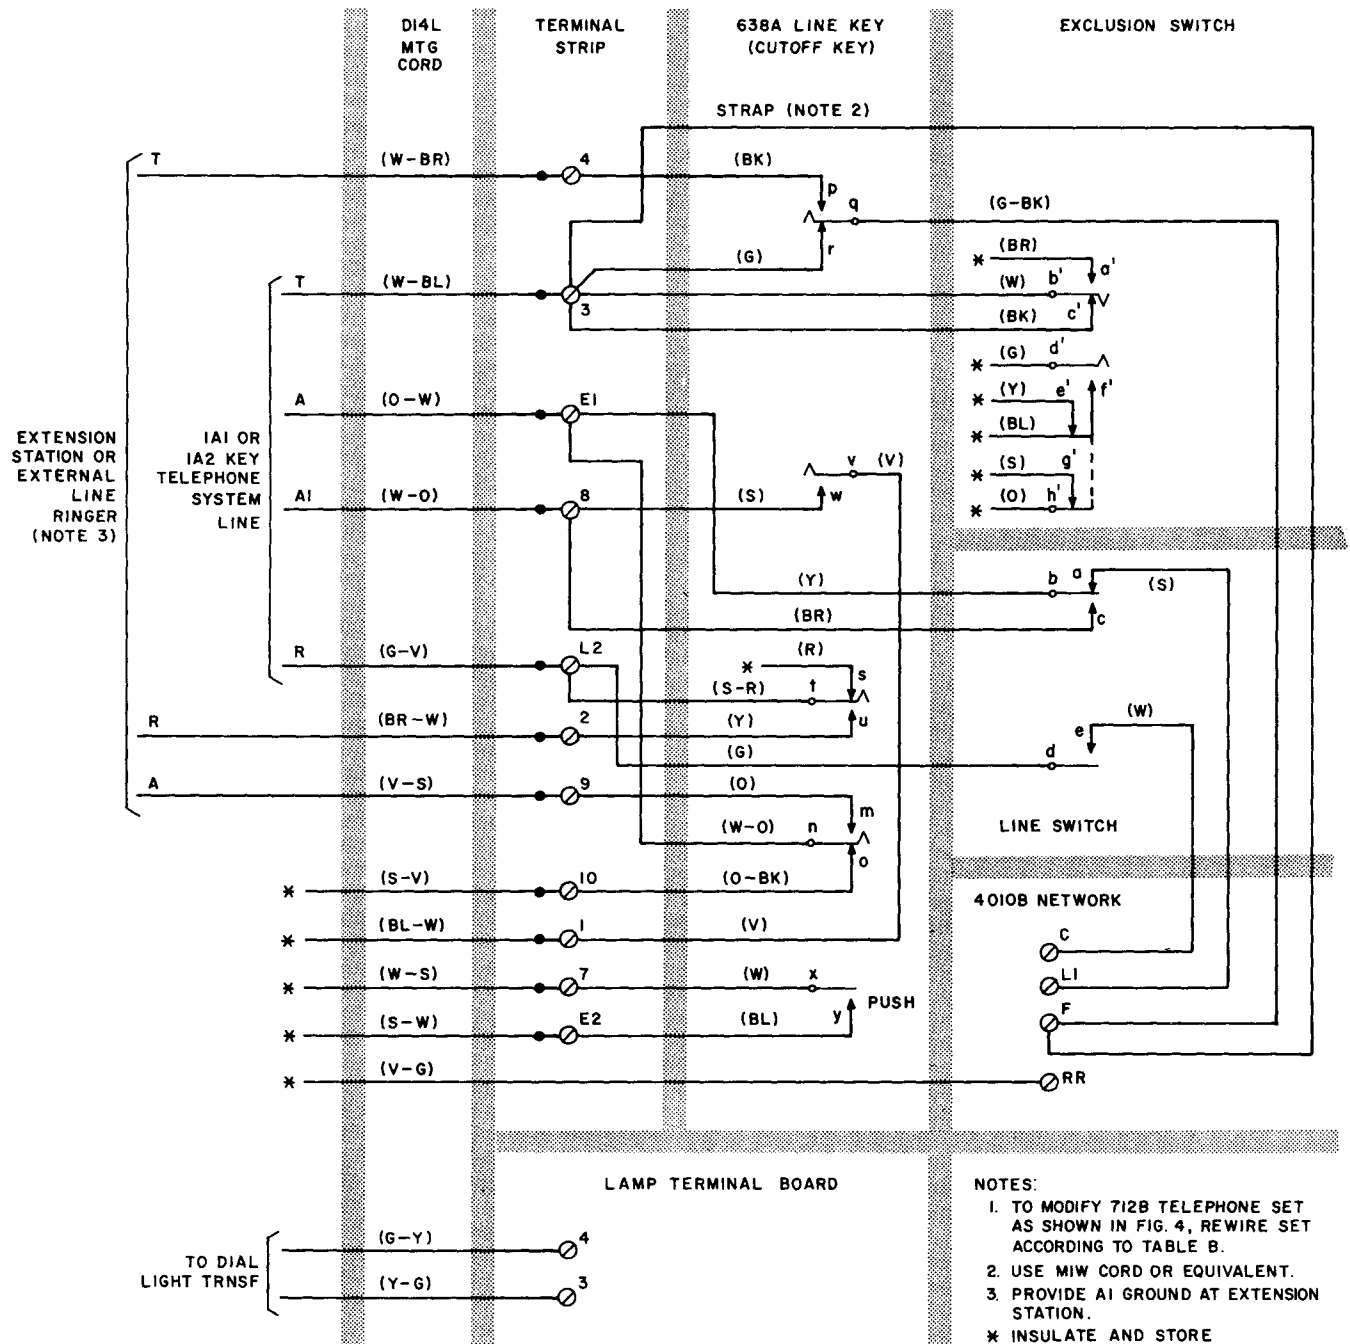


Fig. 4 — 712B Telephone Set, Wired for 1-Line Pickup, Cutoff Feature for Extension Station or External Line Ringer